


Autodesk Docs://23-0601_CTA RLE Community Office/23-0601_CTA RLE Community Office_P23.rvt

8/20/2024 9:27:25 AM

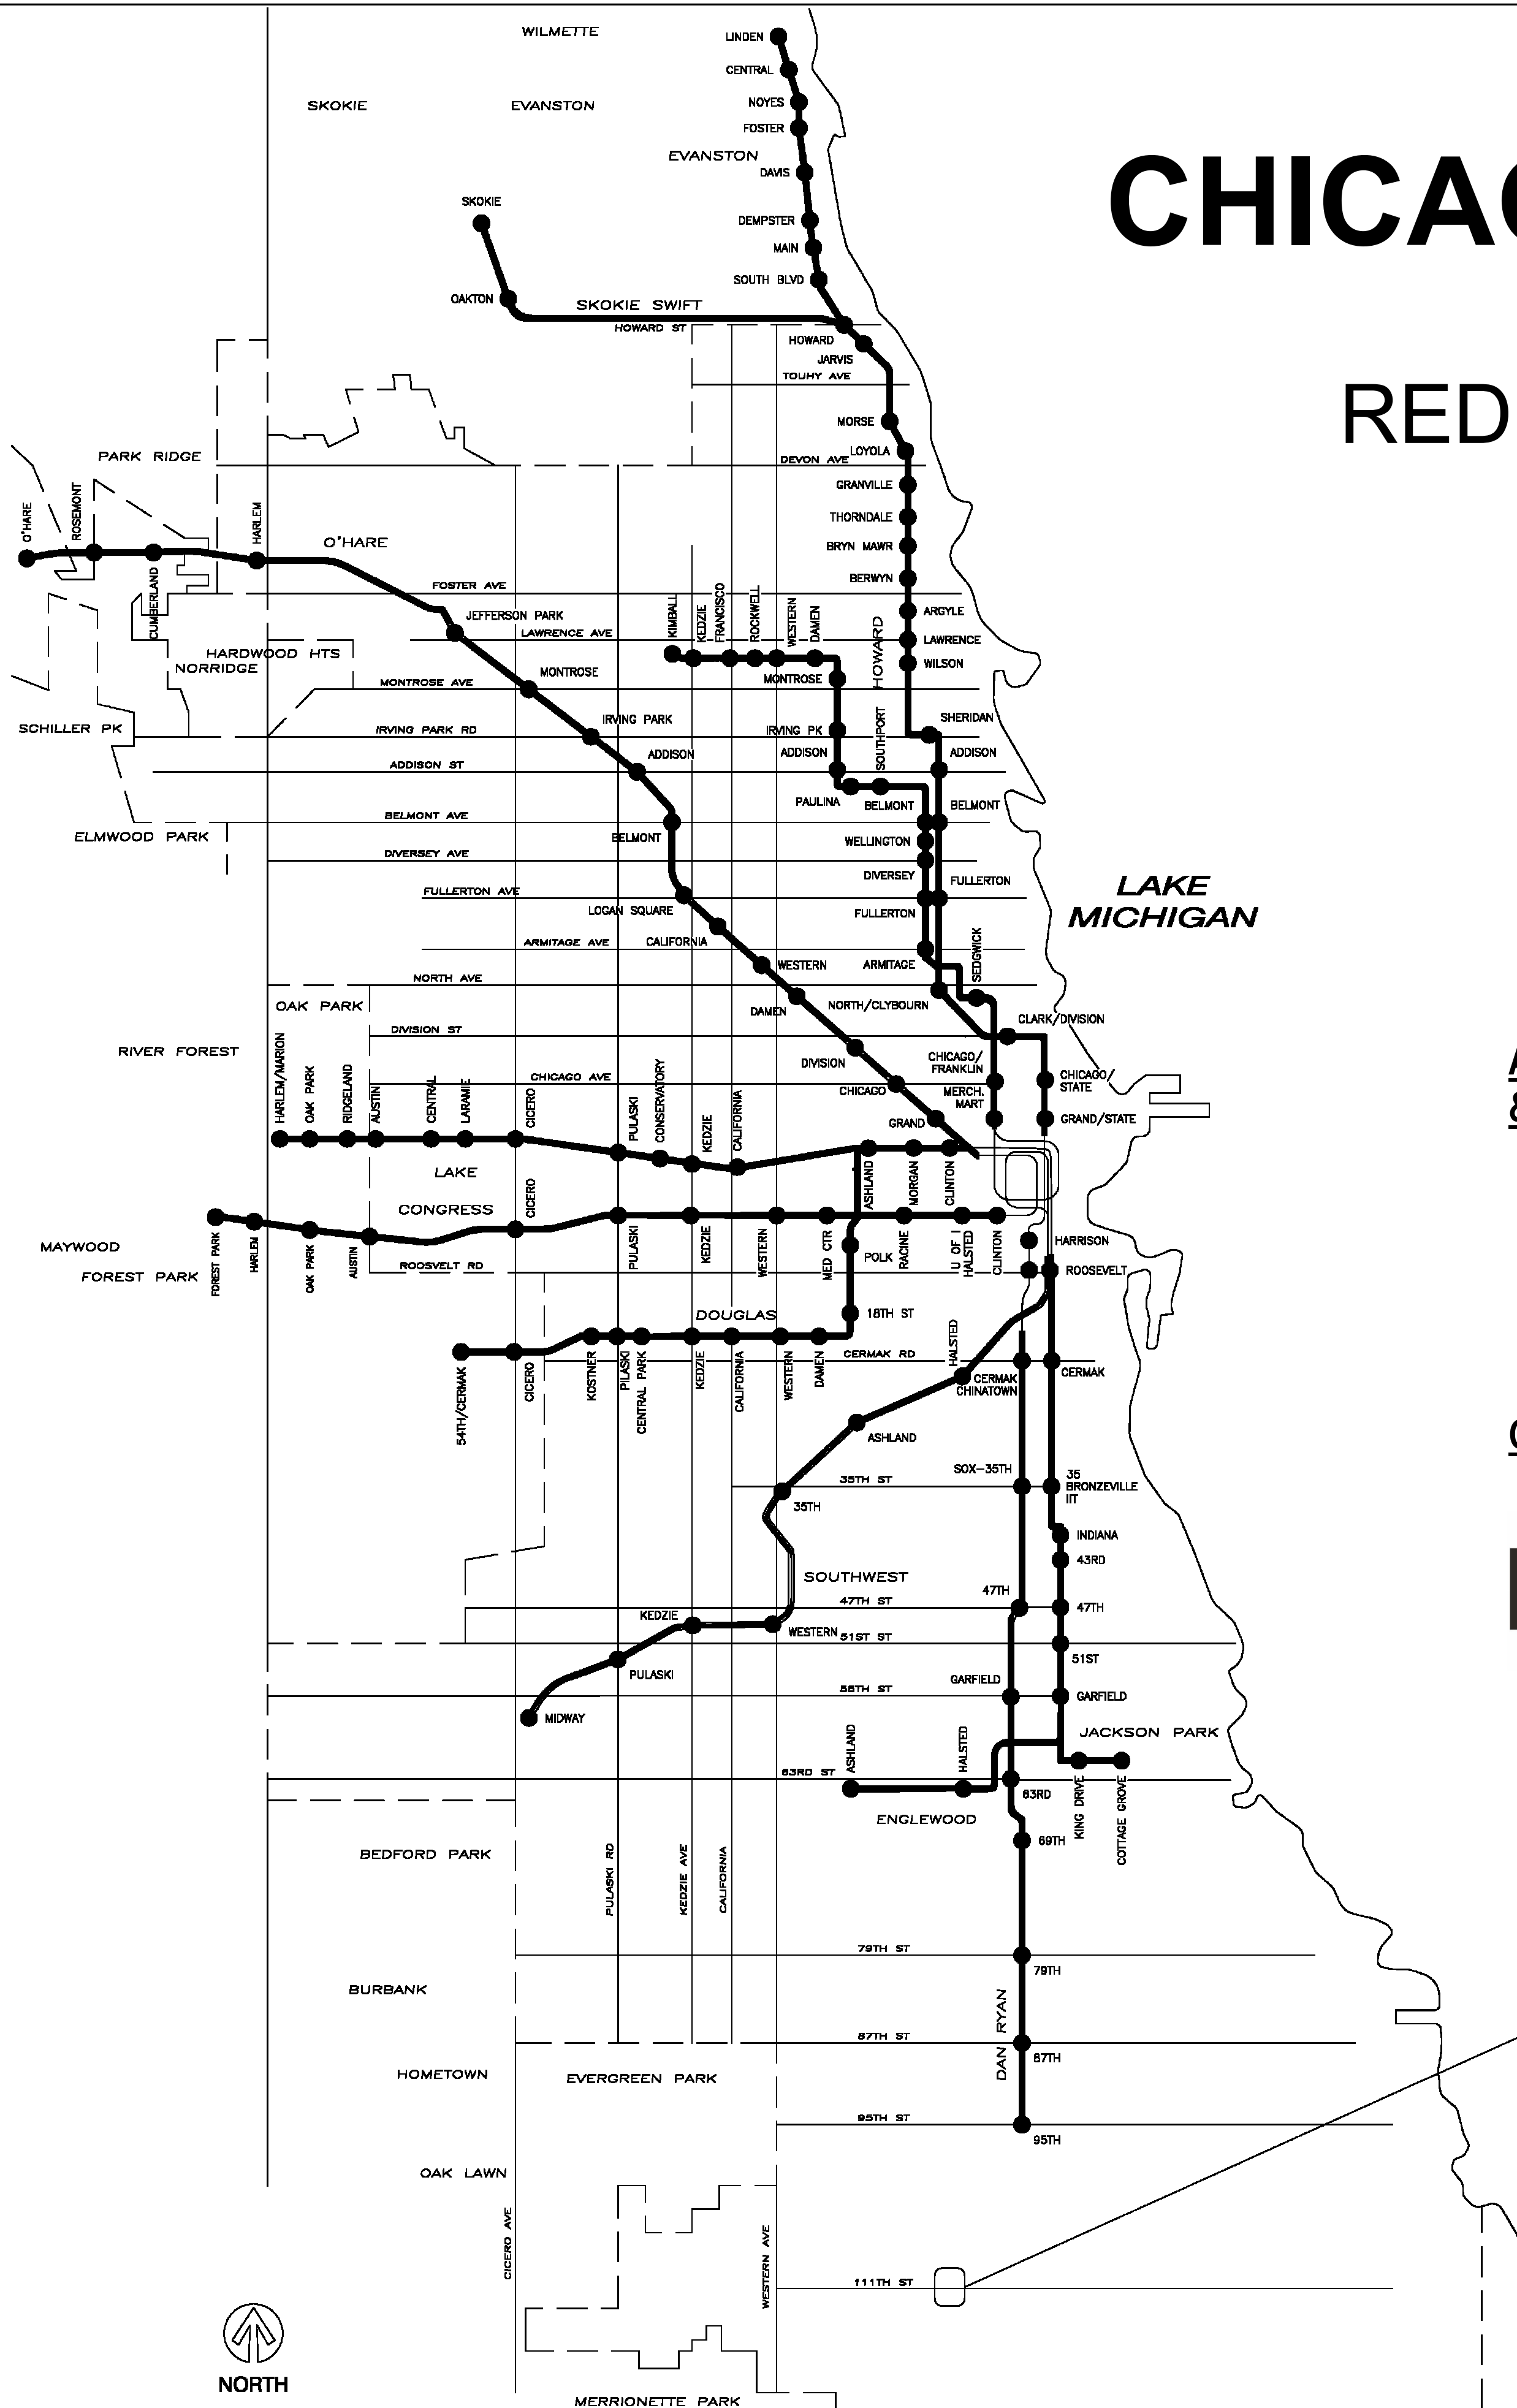

CHICAGO TRANSIT AUTHORITY

RED LINE EXTENSION - COMMUNITY OFFICE BUILDOUT

CTA TRADES PACKAGE

PROJECT NO. 2019-0017.06
REQUISITION NO. B21FI04752

ARCHITECTURAL
& STRUCTURAL



CIVIL



**INFRASTRUCTURE
ENGINEERING** | INCORPORATED

MEP/FP



ENVIRONMENTAL



ELECTRICAL, COMMUNICATIONS & LIGHTING



ENERGY CONSERVATION CODE STATEMENT

I CERTIFY THAT I AM A REGISTERED ENERGY PROFESSIONAL(Rep.). I ALSO CERTIFY THAT TO THE BEST OF KNOWLEDGE AND BELIEF THAT ATTACHED PLANS FOR 401 W 111TH STREET, CHICAGO, IL 60628 NEED NOT COMPLY WITH THE REQUIREMENTS OF CHAPTER 18-13, ENERGY CONSERVATION, OF THE MUNICIPAL CODE OF CHICAGO.

SIGNED

DATED

CERTIFICATION STATEMENT

I CERTIFY THAT THESE DRAWINGS WERE PREPARED UNDER MY DIRECT SUPERVISION AND TO THE BEST OF MY PROFESSIONAL KNOWLEDGE THAT CONFORM TO THE CHICAGO BUILDING CODE.

SIGNED

DATED



Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



SENSITIVE SECURITY INFORMATION

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN 49 CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION, FOR U.S. GOVERNMENT AGENCIES, PUBLIC. DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

RED LINE EXTENSION COMMUNITY OFFICE BUILDOUT

401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

MARK	2024-07-25 DATE	MAINCON - ISSUE FOR BID DESCRIPTION
------	--------------------	--

COVER SHEET

G-1001

[illegible]

GENERAL NOTES

1. THE PROJECT MUST BE CONSTRUCTED IN ACCORDANCE WITH THE CONTRACT DRAWINGS AND SPECIFICATIONS AND ANY RULES, REGULATIONS, STANDARDS OR SPECIFICATIONS REFERENCED THEREIN.
2. THE CONTRACTOR MUST COMPLY WITH ALL FEDERAL, STATE, AND LOCAL SAFETY REGULATIONS AS WELL AS THOSE SPECIFIED IN THE CONTRACT DRAWINGS AND SPECIFICATIONS.
3. NO REQUIREMENTS OF THIS CONTRACT WITH RESPECT TO PRECAUTIONS REQUIRED OR OMITTED WILL BE DEEMED TO LIMIT OR IMPAIR ANY OBLIGATIONS ASSUMED BY THE CONTRACTOR UNDER OR IN CONNECTION WITH THIS CONTRACT, AND THE CONTRACTOR MUST AT ALL TIMES MAINTAIN ADEQUATE PROTECTION TO SAFEGUARD THE PUBLIC, AND ALL PERSONS ENGAGED IN THE WORK AND MUST TAKE SUCH PRECAUTIONS AS WILL ACCOMPLISH SUCH END, WITHOUT INTERFERENCE TO THE PUBLIC, OR MAINTENANCE AND OPERATION OF THE STATION.
4. EXISTING GRADES REPORTED ON THE DRAWINGS ARE BASED ON BEST AVAILABLE INFORMATION; HOWEVER, CTA ASSUMES NO RESPONSIBILITY FOR THE ACCURACY OF THESE GRADES. IF THE CONTRACTOR DOES NOT CONCUR WITH THE ELEVATION PROVIDED ON THE DRAWINGS, THE CONTRACTOR MUST NOTIFY CTA IN WRITING PRIOR TO CONSTRUCTION. NO CONSTRUCTION WILL BE ALLOWED TO BEGIN UNTIL THESE CONFLICTS ARE RESOLVED.
5. EXISTING CONDITIONS WERE TAKEN FROM THE BEST AVAILABLE INFORMATION OR MAPPING INFORMATION SHOWN CONCERNING FEATURES AND UTILITIES IS NOT GUARANTEED ALL INCLUSIVE OR CORRECT. THE CONTRACTOR IS TO VERIFY THE FEATURES PRIOR TO CONSTRUCTION. EXISTING UTILITIES ARE TO BE MAINTAINED IN SERVICE AT ALL TIMES. THE LOCATION OF MATERIALS AND DIMENSIONS OF EXISTING FACILITIES AND OBSTRUCTIONS ARE BASED UPON LOCATION RECORDS AND ARE SHOWN ON THE DRAWINGS STRICTLY AS AID TO THE CONTRACTOR, BUT MUST NOT BE CONSTRUED AS BEING ACCURATE, CORRECT, OR COMPLETE. ALL STRUCTURES ABOVE OR BELOW GROUND THAT ARE ENCOUNTERED DURING CONSTRUCTION ARE TO BE PROPERLY SUPPORTED AND MAINTAINED. THE CONTRACTOR IS TO MAKE ALL ARRANGEMENTS WITH CTA FOR THE PROTECTION OR RELOCATION OF SUCH STRUCTURES. IF DAMAGED DURING CONSTRUCTION THE CONTRACTOR MUST MAKE REPAIRS OR PAY FOR THE REPAIRS OF ANY STRUCTURE TO THE SATISFACTION OF CTA. NO ADDITIONAL COMPENSATION WILL BE MADE FOR ANY SUCH INTERFERENCE OR OBSTRUCTION.
6. THE CONTRACTOR MUST LAYOUT THE LOCATION OF ALL NEW ITEMS FOR REVIEW. NO ITEM SHALL BE CONSTRUCTED UNTIL THE LOCATION IS APPROVED.
7. THE FOLLOWING PROVISIONS, IN ADDITION TO THE CONTRACTOR'S SAFETY PLAN ARE TO BE EXECUTED BY THE CONTRACTOR TO ASSURE SAFE OPERATION DURING CONSTRUCTION ACTIVITY.
 - A. ANY HAZARDOUS MATERIAL SPILLS (REGARDLESS OF AMOUNT) THAT OCCUR ON THE PROJECT AS A RESULT OF CONSTRUCTION ACTIVITIES MUST BE IMMEDIATELY REPORTED TO CTA.
 - B. CONTRACTORS ARE REQUIRED TO HAVE A CLEAN UP AND SPILL KIT ON THE PROJECT SITE AT ALL TIMES WHEN EQUIPMENT IS IN USE. KITS ARE TO BE ADEQUATE SIZE TO HANDLE FUEL OR SOIL, SPILLS COMPARATIVE TO THE TYPE AND NUMBER OF EQUIPMENT IN USE ON THE PROJECT.
8. THE CONTRACTOR IS SOLELY RESPONSIBLE TO DEVELOP A SITE SPECIFIC CONSTRUCTION SAFETY PROGRAM FOR THE PROJECT. APPROVAL MUST BE OBTAINED AT LEAST THIRTY (30) DAYS PRIOR TO THE START OF WORK. THE CONTRACTOR'S SAFETY PROGRAM MUST BE IN ACCORDANCE WITH THE REQUIREMENTS SET FORTH IN THE GENERAL CONDITIONS ARTICLE OF THE SPECIFICATIONS AND APPROVED BY CTA SAFETY DEPARTMENT
9. ALL WORK IN THE PUBLIC WAY REQUIRES A PERMIT FROM THE ILLINOIS DEPARTMENT OF TRANSPORTATION, AND THE CITY OF CHICAGO OFFICE OF MANAGEMENT AND COMMUNICATIONS.
10. THE CONTRACTOR WILL BE REQUIRED TO PAY INSPECTIONS FEES TO THE VARIOUS DEPARTMENTS OF THE CITY OF CHICAGO. THE COSTS WILL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
11. THE CONTRACTOR MUST OBTAIN ALL NECESSARY PERMITS FROM THE CITY OF CHICAGO AND THE STATE OF ILLINOIS PRIOR TO COMMENCING CONSTRUCTION. THE COSTS SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
12. REFER TO THE TECHNICAL SPECIFICATIONS FOR ADDITIONAL INFORMATION AND COORDINATION OF THE WORK. IN THE EVENT OF DISCREPANCIES BETWEEN DRAWINGS OR DRAWINGS AND SPECIFICATIONS CONSULT CTA FOR CLARIFICATION BEFORE PROCEEDING WITH THE WORK.
13. CTA WILL NOT BE RESPONSIBLE FOR, NOR WILL HAVE CONTROL OVER OR CHARGE OF QUALITY CONTROL, CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, PHASING PROCEDURES OR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK, NOR WILL THEY BE RESPONSIBLE FOR THE CONTRACTORS' FAILURE TO CARRY OUT THE WORK IN ACCORDANCE WITH THE REQUIREMENTS OF THE CONTRACT DOCUMENTS. THE CONTRACTOR WILL HAVE SOLE RESPONSIBILITY OF THESE ITEMS. CTA WILL NOT BE RESPONSIBLE FOR OR HAVE CONTROL OR CHARGE OVER THE ACTS OR OMISSIONS OF THE CONTRACTORS, THEIR AGENTS OR EMPLOYEES OR ANY OTHER PERSON PERFORMING ANY OF THE WORK.
14. DETAILS SHOWN MAY NOT NECESSARILY GRAPHICALLY REPRESENT ALL COMPONENTS NECESSARY TO COMPLETE THE TOTAL SYSTEM. THE CONTRACTOR SHALL BE RESPONSIBLE TO COORDINATE ALL OF THE REQUIREMENTS SHOWN ON THE DRAWINGS WITH THOSE STATED IN THE APPLICABLE SPECIFICATIONS AND PROJECT NOTES TO PROVIDE A COMPLETE SYSTEM.
15. DETAILS SHOWN ARE INTENDED TO BE INDICATIVE OF THE PROFILES AND TYPE OF DETAILING REQUIRED FOR THE WORK. CONDITIONS NOT COVERED BY SPECIFIC DETAILS ARE SIMILAR IN CHARACTER AND QUALITY TO THOSE DETAILED AND SHALL MEET SPECIFIED DESIGN CRITERIA.
16. DIMENSIONS WILL GOVERN; DO NOT SCALE DRAWINGS OR ELECTRONIC DATA. ALL DIMENSIONS ARE TO BE FIELD VERIFIED FOR ANY ELEMENTS TO BE CONNECTED TO EXISTING ELEMENTS OR ANY ELEMENTS PREVIOUSLY CONSTRUCTED.
17. WHERE SPECIFIC DIMENSIONS, DETAILS, OR DESIGN INTENT CANNOT BE DETERMINED, CONSULT CTA IN WRITING BEFORE PROCEEDING WITH THE WORK.
18. THE CONTRACTOR SHALL CONDUCT ITS OWN FIELD SURVEY TO ESTABLISH EXISTING DIMENSIONAL PARAMETERS AS RELATES TO THE DESIGN BEFORE PROCEEDING WITH THE WORK. NOTIFY CTA IN WRITING OF DISCREPANCIES WHICH WILL NOT ALLOW EXECUTION OF THE DESIGN AS SHOWN.
19. ELEMENTS SHALL BE SHOP FABRICATED TO THE GREATEST EXTENT POSSIBLE AND SHIPPED PROTECTED TO REDUCE FIELD WELDING AND FIELD TOUCH UP.
20. ALL DISSIMILAR METALS SHALL BE EFFECTIVELY ISOLATED FROM EACH OTHER WITH A HEAVY COATING OF EPOXY PAINT, BUTYL TAPE, BITUMINOUS COATING, OR OTHER APPROVED MEANS TO AVOID CORROSION FROM GALVANIC ACTION.

21. WHEN NOTED ON THE DRAWINGS OR IN THE SPECIFICATIONS THE CONTRACTOR SHALL PROVIDE FINISHED FIELD SAMPLES WHICH, WHEN ACCEPTED, MAY BECOME PART OF THE FINAL WORK AT CTA'S APPROVAL.
22. MOVING UTILITIES WILL BE THE RESPONSIBILITY OF THE UTILITY COMMISSIONER EXCEPT AS NOTED ON THE PLANS, IN THE GENERAL NOTES, AND IN THE SPECIFICATIONS. THE CONTRACTOR WILL BE RESPONSIBLE FOR COORDINATING ANY UTILITY RELOCATION(S). THE CONTRACTOR SHALL NOTIFY UTILITY COMPANIES IN ADVANCE, ALLOWING SUFFICIENT TIME TO COMPLETE THE WORK IN ACCORDANCE WITH THE CONTRACTOR'S SCHEDULE. COORDINATION EFFORTS WILL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
23. AS-BUILT PLANS SHALL BE SUBMITTED SOON AFTER WORK COMPLETION. FINAL PAYMENT WILL NOT BE MADE TO THE CONTRACTOR UNTIL CTA ACKNOWLEDGES RECEIPT AND ACCEPTANCE OF AS-BUILT PLANS. CONTRACTOR WILL SUBMIT COMPLETE SET OF AS-BUILT DRAWINGS AND COMPLETE SET OF PLANS ON PDF AND ELECTRONIC FORMAT COMPATIBLE WITH CTA CAD STANDARDS. THE COST FOR ALL PAPER AND ELECTRONIC AS-BUILT PLANS WILL BE CONSIDERED IN THE COST OF THE CONTRACT.
24. THE CONTRACTOR MUST MAINTAIN ACCESS TO FIRE HYDRANTS, BUILDING STANDPIPES AND OTHER EMERGENCY FACILITIES WITHIN THE CONSTRUCTION ZONE.
25. REGULATORY, WARNING, AND GUIDE SIGNS CONFLICTING WITH THE PROPOSED IMPROVEMENT MUST BE RELOCATED BY THE CONTRACTOR AS DIRECTED BY CTA. THE COSTS SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
26. IN ESTABLISHING THE SCHEDULE FOR THIS CONTRACT, THE CONTRACTOR MUST CONSIDER THE FOLLOWING: NO ADDITIONAL COMPENSATION OR EXTENSION OF TIME FOR COMPLETION OF THE PROJECT, OR ANY MILESTONE OF THE PROJECT WILL BE ALLOWED DUE TO THE PHASING OF WORK, OR DUE TO WEATHER CONDITIONS WHICH MAY IMPEDE THE PROGRESS OF THE WORK. THE CONTRACTOR MAY PETITION CTA TO WORK OVERTIME IN ORDER TO COMPLETE THE ENTIRE PROJECT AS SPECIFIED HEREIN AND WITHIN CONSTRAINTS IDENTIFIED.
27. THE CONTRACTOR MUST COMPLETE CLEANUP AND RESTORATION OF THE ENTIRE PROJECT AREA, INCLUDING STAGING AND STORAGE AREAS, AS APPROVED BY CTA, WITHIN THIRTY (30) DAYS OF SUBSTANTIAL COMPLETION. ANY AREA DAMAGED WITHIN THE PROJECT SITE DURING CONSTRUCTION MUST BE IMMEDIATELY RESTORED TO ITS ORIGINAL CONDITION BY THE CONTRACTOR AT HIS OWN EXPENSE.
28. THE CONTRACTOR WILL BE RESPONSIBLE FOR THE PRESERVATION OF ALL PROPERTY AND MUST CAREFULLY PROTECT FROM DAMAGE OR DISTURBANCE. IF DAMAGE TO PROPERTY DOES OCCUR DURING THE WORK, THE CONTRACTOR MUST RESTORE, AT NO EXPENSE TO CTA, SUCH PROPERTY TO A CONDITION EQUAL TO THAT EXISTING BEFORE SUCH DAMAGE WAS DONE BY REBUILDING OR RESTORING AS DIRECTED BY CTA.
29. NOTES APPEAR ON VARIOUS SHEETS FOR DIFFERENT SYSTEMS AND MATERIALS. NOTES ON ANY ONE SHEET ARE TO BE APPLIED TO RELATED DRAWINGS AND DETAILS. WHEN THERE ARE DISCREPANCIES WITHIN THE CONTRACT DOCUMENTS, INCLUDING, BUT NOT LIMITED TO, DISCREPANCIES WITHIN DRAWINGS OR WITHIN THE SPECIFICATIONS, CONSULT CTA DURING THE BID PERIOD FOR ANY CLARIFICATIONS NEEDED PRIOR TO SUBMISSION OF BID. IF CTA IS NOT CONSULTED DURING THE BID PERIOD, THE MORE STRINGENT REQUIREMENT SHALL APPLY.

1. PRIOR TO SUBMISSION OF BID, THE GENERAL CONTRACTOR SHALL VISIT THE SITE AND BE KNOWLEDGEABLE OF ALL CONDITIONS THEREON. HE OR SHE SHALL INVESTIGATE, VERIFY, AND BE RESPONSIBLE FOR ALL CONDITIONS OF THE PROJECT AND SHALL NOTIFY CTA OF ANY CONDITIONS REQUIRING MODIFICATION OR CLARIFICATION BEFORE PROCEEDING WITH THE WORK. THE CONTRACTOR IS RESPONSIBLE FOR ALL MEANS, METHODS, AND TECHNIQUES TO IMPLEMENT THE DESIGN AS PART OF THEIR BASE BID.
2. NOTES APPEARING ON VARIOUS SHEETS ARE TO BE APPLIED TO RELATED DRAWINGS AND DETAILS. WHEN THERE ARE DISCREPANCIES BETWEEN DRAWINGS AND SPECIFICATIONS, CONSULT CTA DURING THE BID PERIOD FOR ANY CLARIFICATION NEEDED PRIOR TO SUBMISSION OF BID. IF CTA IS NOT CONSULTED DURING THE BID PERIOD, THE MORE STRINGENT REQUIREMENT SHALL APPLY.
3. THE CONTRACTOR IS RESPONSIBLE FOR THE COMPLETE DEMOLITION OF SITE AS REQUIRED TO COMPLETE THE NEW BUILDING SCOPE OF WORK AND ASSOCIATED SITE WORK.
4. THE GENERAL CONTRACTOR SHALL UTILIZE PROVIDED GEOTECHNICAL REPORTS FOR EXCAVATION AND BACKFILL REQUIREMENTS FOR THE PROJECT. SEE CIVIL AND STRUCTURAL DRAWINGS AND/OR SPECIFICATIONS AND THE GEOTECHNICAL REPORT FOR SOIL REMOVAL REQUIREMENTS.
5. UTILITY RUNS AND DIMENSIONS ARE APPROXIMATE. GENERAL CONTRACTOR TO VERIFY LENGTHS PRIOR TO SUBMISSION OF BID.
6. CONTRACTOR TO REFER TO ENVIRONMENTAL REPORT AND SPECIFICATIONS FOR HANDLING OF SITE EXCAVATION SPOILS. UNCONTAMINATED SPOILS FROM EXCAVATION THAT CANNOT BE REUSED ON SITE SHALL BE STOCKPILED FOR CTA USE ELSEWHERE, AT A LOCATION INDICATED BY CTA WITHIN 1/4 MILE OF SITE OR AS INDICATED BY COMMISSIONING REPRESENTATIVE.
7. THE SUBMISSION OF A BID OR PROPOSAL WILL BE CONSTRUED AS EVIDENCE THAT THE CONTRACTOR HAS FAMILIARIZED HIMSELF WITH THE PLANS AND EXISTING CONDITIONS OF THE BUILDING SITE. CLAIMS MADE SUBSEQUENT TO THE PROPOSAL FOR MATERIALS AND LABOR BECAUSE OF DIFFICULTIES ENCOUNTERED WILL NOT BE RECOGNIZED IF THEY COULD HAVE BEEN FORESEEN, HAD PROPER EXAMINATION OF THE SITE AND/OR DRAWINGS BEEN MADE.









[illegible]

PROJECT TARGET LEGEND

F	FE	FIRE EXTINGUISHER
F	FEC	FIRE EXTINGUISHER CABINET
F	FF	FINISHED FLOOR
F	FIN	FINISH(ED)
F	FLR	FLOOR
F	FP	FIRE PROTECTION
F	FT	FEET, FOOT
F	FTG	FOOTING
G	GA	GAUGE
G	GALV	GALVANIZED
G	GB	GYPSUM BOARD
G	GC	GENERAL CONTRACTOR
G	GCMU	GLAZED CONCRETE MASONRY UNIT
G	GFCI	GROUND FAULT CIRCUIT INTERRUPTER
G	GFCMU	GROUND FACE CONCRETE MASONRY UNIT
G	GFRC	GLASS FIBER REINFORCED CONCRETE
G	GFRG	GLASS FIBER REINFORCED GYPSUM
G	GL	GLASS
H	HB	HOSE BIB
H	HC	HOLLOW CORE
H	HDW	HARDWARE
H	HM	HOLLOW METAL
H	HORIZ	HORIZONTAL(LY)
H	HP	HIGH POINT
H	HR(S)	HOURL(S)
H	HT	HEIGHT
H	HVAC	HEATING, VENTILATING, AND AIR CONDITIONING
H	HW	HOT WATER
H	HWD	HARDWOOD
H	HWH	HOT WATER HEATER
I	ID	INSIDE DIAMETER
I	IN	INCH(ES)
I	INCL	INCLUDE(D)(ING)
I	INFO	INFORMATION
I	INSUL	INSULATION
I	INT	INTERIOR, INTERNAL
J	JAN	JANITOR
J	JST	JOIST
J	JT	JOINT
L	LAM	LAMINATE(D)
L	LAV	LAVATORY
L	LBP	LEAD-BASED PAINT
L	LBS	POUND(S)
L	LF	LINEAR FEET
L	LH	LEFT HAND
L	LLH	LONG LEG HORIZONTAL
L	LLV	LONG LEG VERTICAL
L	LP	LOW POINT
L	LVL	LEVEL
M	MATL	MATERIAL(S)
M	MAX	MAXIMUM
M	MECH	MECHANICAL
M	MEP	MECHANICAL, ELECTRICAL & PLUMBING
M	MEZZ	MEZZANINE
M	MFR	MANUFACTURER(R)(D)
M	MH	MANHOLE
M	MIN	MINIMUM
M	MISC	MISCELLANEOUS
M	MNT	MOUNT(ING)
M	MO	MASONRY OPENING
M	MOPD	MAYOR'S OFFICE FOR PEOPLE WITH DISABILITIES
M	MTD	MOUNTED
M	MTL	METAL
M	MWK	MILLWORK
N	NIC	NOT IN CONTRACT
N	NO	NUMBER
N	NOM	NOMINAL

	N	NTS	NOT TO SCALE
O	OC		ON CENTER
O	OCC		OCCUPANCY
O	OD		OUTSIDE DIAMETER
O	OHD		OVERHEAD DOOR
O	OPH		OPPOSITE HAND
O	OPNG		OPENING
O	OPP		OPPOSITE
P	PCT		PORCELAIN CERAMIC TILE
P	PHEN		PHENOLIC
P	PJF		PREMOLDED JOINT FILLER
P	PL		PLATE
P	PLAM		PLASTIC LAMINATE
P	PLSTR		PLASTER
P	PLUMB		PLUMBING
P	PNL		PANEL
P	POU		POINT OF USE
P	PR		PAIR
P	PRC		PRECAST
P	PREFAB		PREFABRICATE(D)
P	PT(D)		PAINT(ED)
P	PTN		PARTITION
P	PVC		POLYVINYL CHLORIDE
P	PWD		PLYWOOD
Q	QT		QUARRY TILE
R	RB		RESILIENT BASE
R	RCP		REFLECTED CEILING PLAN
R	RD		ROOF DRAIN
R	REF		REFERENCE
R	REINF		REINFORCED(D)(ING)
R	REQD		REQUIRED
R	RH		RIGHT HAND
R	RM		ROOM
R	RO		ROUGH OPENING
R	ROW		RIGHT-OF-WAY
R	RSR		RISER
R	RTN		RETURN
S	SAN		SANITARY
S	SC		SEALED CONCRETE
S	SCFT		STRUCTURAL CLAY FACING TILE
S	SCHED		SCHEDULE
S	SCWD		SOLID CORE WOOD DOOR
S	SF		SQUARE FEET(FOOT)
S	SFCMU		SPLIT FACE CONCRETE MASONRY
S	SHT		SHEET
S	SHWR		SHOWER
S	SIM		SIMILAR
S	SPEC(S)		SPECIFICATION(S)
S	SQ		SQUARE
S	ST STL		STAINLESS STEEL
S	STL		STEEL
S	STN		STONE
S	STRUC		STRUCTURE/STRUCTURAL
S	SUSP		SUSPENDED
T	T&G		TONGUE AND GROOVE
T	TI		TOP OF
T	TD		TRENCH DRAIN
T	TEL		TELEPHONE
T	TEMP		TEMPORARY
T	THK		THICK(NESS)
T	TRD		TREAD
T	TYP		TYPICAL
T	TZ		TERRAZZO
U	UL		UNDERWRITER'S LABORATORIES
U	UNF		UNFINISHED
U	UNO		UNLESS NOTED OTHERWISE
U	UNX		UNEXCAVATED

U URN	URINAL
V VB	VINYL BASE
V VCT	VINYL COMPOSITION TILE
V VERT	VERTICAL(LY)
V VIF	VERIFY IN FIELD
V VTR	VENT THROUGH ROOF
W W/	WITH
W WAP	WIRELESS ACCESS POINT
W WC	WATER CLOSET
W WD	WOOD
W WGT	WEIGHT
W WH	WALL HUNG
W WM	WIRE MESH
W WP	WORKING POINT
W WR	WATER RESISTANT
W WRB	WEATHER RESISTIVE BARRIER
W WWF	WELDED WIRE FABRIC

View Name		DRAWING TITLE
	DETAIL NUMBER SHEET NUMBER	WALL/BUILDING SECTIONS
	DETAIL NUMBER SHEET NUMBER	
	SECTION TAIL	
	SECTION NUMBER SHEET NUMBER	DETAIL SECTIONS
	DETAIL NUMBER SHEET NUMBER	ENLARGED PLAN/SECTION/ELEVATION
	DETAIL NUMBER ELEVATION	ELEVATION TAG
	ELEVATION NUMBER SHEET NUMBER	INTERIOR ELEVATIONS
	COLUMN LINE COLUMN NUMBER	COLUMN BUBBLE
	Room name ROOM NUMBER	ROOM TAG
	REVISION NUMBER	REVISION TAG
	COORDINATES	SPOT COORDINATE
	ELEVATION	SPOT ELEVATION
	KEYNOTE NUMBER	KEYNOTE TAG
	WINDOW NUMBER	WINDOW TAG
	DOOR NUMBER	DOOR TAG
	MATCHLINE DRAWING	REFERENCE TAG
	PROJECT NORTH DIRECTION	NORTH ARROW
	CENTERLINE	
	DISTANCE 1'-0"	DIMENSION



CHICAGO TRANSIT
AUTHORITY

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLING INFORMATION UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

RED LINE EXTENSION COMMUNITY OFFICE BUILDOUT

401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

[illegible]

NOTES, ABBREVIATIONS SYMBOLS

G-1004



G-1005

CITY OF CHICAGO DEPARTMENT OF BUILDINGS

GENERAL BUILDING REQUIREMENTS PER CHICAGO ZONING ORDINANCE (CZO)

ITEM	SUBJECT	CODE REFERENCE	ORDINANCE REQUIREMENT	ACTUAL	LOCATION / SHEET NO.
CHICAGO ZONING ORDINANCE REQUIREMENTS					
Z.01	ZONING DISTRICT / PLANNED DEVELOPMENT NO.	ZONING MAP	B1-1	B1-1	
Z.02	EXISTING ZONING USE(S)	17-3-0100		SS-7 MOTOR VEHICLE REPAIR SHOP	
Z.03	PROPOSED ZONING USE(S)	17-3-0100		KK-OFFICE	
Z.04	CHICAGO LANDMARK DESIGNATION	BUILDING NOT LISTED AS LANDMARKED NOR IN LANDMARK DISTRICT	NOT REQUIRED	EXISTING, NO CHANGE	
Z.05	LAKEFRONT PROTECTION DISTRICT	ZONING MAP, CH. 16-4	N/A	EXISTING, NO CHANGE	
Z.06	ZONING OVERLAY DISTRICT	ZONING MAP, CH. 17-7	N/A	EXISTING, NO CHANGE	
Z.07	PEDESTRIAN STREET	ZONING MAP, 17-3-0500	N/A	EXISTING, NO CHANGE	
Z.08	LOT AREA	17-3-0305-B	2655 SQ. FT.	EXISTING, NO CHANGE	
Z.09	FLOOR AREA RATIO (FAR)	17-3-0403	1.2 MAX.	1.02	
Z.10	TOTAL FLOOR AREA	17-3-0305	3983 SQ. FT.	3000 SQ.FT (EXISTING, NO CHANGE)	
Z.11	BUILDING HEIGHT	13-48-030	20'-0" MAX	14'-10" (EXISTING NO CHANGE)	
Z.12	FRONT SETBACK	17-3-0404	NOT REQUIRED	EXISTING, NO CHANGE	
Z.13	COMBINED SIDE SETBACKS	17-3-0404	NOT REQUIRED	EXISTING, NO CHANGE	
Z.14	REAR SETBACKS	17-3-0405	NOT REQUIRED	EXISTING, NO CHANGE	
Z.15	REAR YARD / ON-SITE OPEN SPACE	17-5-0400	NOT REQUIRED	EXISTING, NO CHANGE	
Z.16	NUMBER OF DWELLING UNITS	VARIES BY DISTRICT	NOT REQUIRED	EXISTING, NO CHANGE	
	NUMBER OF EFFICIENCY UNITS (INCLUDE ABOVE)	VARIES BY DISTRICT	NOT REQUIRED	EXISTING, NO CHANGE	
Z.17	NUMBER OF OFF STREET PARKING SPACES	17-10-0200; 17-10-0102-B	0	EXISTING, NO CHANGE	
	EVSE-READY PARKING SPACES (INCLUDE ABOVE)	17-10-1011 (EFF. 11/1/20)	NOT REQUIRED	EXISTING, NO CHANGE	
Z.18	NUMBER OF OFF-STREET LOADING SPACES	17-10-1100	0	0	
Z.19	LANDSCAPE ORDINANCE COMPLIANCE	CH. 17-11	NOT REQUIRED	N/A	
Z.20	TOWNHOUSE DEVELOPMENT STANDARDS	17-2-0500	NOT REQUIRED	N/A	
Z.21	PLANNED DEVELOPMENT STANDARDS	CH. 17-8	NOT REQUIRED	N/A	
Z.22	OPEN SPACE IMPACT FEE WORKSHEET	CH. 16-18	NOT REQUIRED	N/A	
Z.23	AFFORDABLE REQUIREMENTS ORDINANCE (ARO)	CH. 2-44	NOT REQUIRED	N/A	
Z.24	PLAT OF SURVEY	17-13-1302-B	REQ'D	PROVIDED	



Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



CHICAGO TRANSIT AUTHORITY

SENSITIVE SECURITY INFORMATION

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN 49 CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION, FOR U.S. GOVERNMENT AGENCIES. PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED. CTA ASSUMES NO RISK OF LIABILITY FOR ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY SCALING OF THIS DRAWING.

RED LINE EXTENSION COMMUNITY OFFICE BUILDOUT

401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

	2024-07-25	MAINCON - ISSUE FOR BID
MARK	DATE	DESCRIPTION

ZONING CODE MATRIX

G-1010

Autodesk Docs://23-0601_CTA RLE Community Office_P23.rvt

7/25/2024 10:28:32 AM

CITY OF CHICAGO DEPARTMENT OF BUILDINGS

GENERAL BUILDING REQUIREMENTS PER CHICAGO BUILDING CODE (CBC)

ITEM	SUBJECT	CODE REFERENCE	ORDINANCE REQUIREMENT	ACTUAL	LOCATION / SHEET NO.
2019 CHICAGO BUILDING CODE REQUIREMENTS					
B.03.01	PROPOSED OCCUPANCY CLASSIFICATION(S)	14B-3-302.1		B- BUSINESS	G-006
B.03.02	EXISTING OCCUPANCY CLASSIFICATION(S)	14R-3-302.3, CH. 14B-3		S-1 REPAIR GARAGE	G-006
B.04.01	SPECIAL OCCUPANCY CONDITIONS	CH. 14B-4	N/A	N/A	-----
B.05.01	GRADE PLANE	14B-2-203.2	N/A	EXISTING	-----
B.05.02	BUILDING HEIGHT IN FEET ABOVE GRADE PLANE	14B-2-203.3, 14B-5-504.3	20'-0"	14' 10"	-----
B.05.03	NUMBER OF STORIES ABOVE GRADE PLANE	14B-2-202, 14B-5-504.4	1 STORY	NO CHANGE	-----
B.05.04	MEZZANINE / EQUIPMENT PLATFORM	14B-5-505	N/A	N/A	-----
B.05.05	BUILDING AREA	14B-2-203.4, 14B-5-506	8000 SF MAX.	3,000 SF (NO CHANGE)	G-1012
B.05.06	NUMBER OF BASEMENTS EXCLUDED FROM AREA	14B-5-506.1.3	1	NO CHANGE	NO CHANGE TO EXISTING
B.05.07	FRONTAGE INCREASE	14B-5-506.3	N/A	N/A	-----
B.05.08	MIXED OCCUPANCY STRATEGY	14B-5-508	N/A	N/A	-----
B.05.09	ACCESSORY OCCUPANCIES	14B-5-508.2	N/A	N/A	-----
B.05.10	INCIDENTAL USES	14B-5-509	N/A	N/A	-----
B.06.01	CONSTRUCTION CLASSIFICATION	14B-6-602	ALL	TYPE IIB	NO CHANGE TO EXISTING
	RATING - PRIMARY STRUCTURAL FRAME	TABLE 14B-6-601, 14B-7-704	0 HOUR	NO CHANGE	NO CHANGE TO EXISTING
	RATING - EXTERIOR BEARING WALLS	TABLE 14B-6-601, 14B-6-602	0 HOUR	NO CHANGE	NO CHANGE TO EXISTING
	RATING - INTERIOR BEARING WALLS	TABLE 14B-6-601	0 HOUR	NO CHANGE	NO CHANGE TO EXISTING
	RATING - EXTERIOR NON-BEARING WALLS	TABLE 14B-6-602	0 HOUR	NO CHANGE	NO CHANGE TO EXISTING
	RATING - FLOOR CONSTRUCTION	TABLE 14B-6-601	0 HOUR	NO CHANGE	NO CHANGE TO EXISTING
	RATING - ROOF CONSTRUCTION	TABLE 14B-6-601	0 HOUR	NO CHANGE	NO CHANGE TO EXISTING
B.07.01	EXTERIOR WALL RATING	TABLE 14B-6-601, 14B-6-602	X >= 30	NO CHANGE	NO CHANGE TO EXISTING
B.07.02	EXTERIOR WALL PROJECTIONS	14B-7-705.2	40 INCHES	NO CHANGE	NO CHANGE TO EXISTING
B.07.03	EXTERIOR WALL OPENINGS	14B-7-705.8	NO LIMIT	NOT PERMITTED	NO CHANGE TO EXISTING
B.07.04	EXTERIOR WALL PARAPETS	14B-7-705.11		NO CHANGE	NO CHANGE TO EXISTING
B.07.05	FIRE WALL RATING	14B-7-706.4	N/A	N/A	-----
B.07.06	FIRE WALL OPENINGS	14B-7-706.8, 14B-7-716.1	N/A	N/A	-----
B.07.07	WALL/ FLOOR RATING - OCCUPANCY SEPARATION	14B-7-709.3.9, 14B-7-711.2.4.1	N/A	N/A	-----
B.07.08	WALL/ FLOOR RATING - FIRE AREA SEPARATION	14B-7-707.3.10, 14B-7-711.2.4.2	N/A	N/A	-----
B.07.09	WALL/FLOOR RATING - CONTROL AREA	14B-4-414.2.4, 14B-7-707.3.8	N/A	N/A	-----
B.07.10	WALL/FLOOR RATING - INCIDENTAL USES	14B-7-707.3.7, 14B-7-711.2.4.5	N/A	N/A	-----
B.07.11	WALL/FLOOR RATING - UNIT SEPARATION	14B-4-420, 14B-7-711.2.4.3	N/A	N/A	-----
B.07.12	WALL/FLOOR RATING - CORRIDOR	14B-7-708, 14B-10-1020.1	N/A	N/A	-----
B.07.13	SMOKE BARRIER	14B-7-709	1 HOUR	N/A	-----
B.07.14	VERTICAL OPENINGS	14B-7-712	N/A	N/A	-----
B.07.15	SHAFT ENCLOSURE - RATING	14B-7-713.4	1 HOUR	N/A	-----
B.07.16	SHAFT ENCLOSURE - CONTINUITY	14B-7-713.5	N/A	N/A	-----
B.07.17	SHAFT ENCLOSURE - OPENINGS/ PENETRATIONS	14B-7-713.7, 14B-7-713.8	N/A	N/A	-----
B.07.18	PENETRATION OF RATED CONSTRUCTION	14B-7-714	TO MATCH	TO MATCH	TO MATCH
B.07.19	OPENING PROTECTIVES	14B-7-716	N/A	N/A	-----
B.07.20	DUCT AND AIR TRANSFER OPENINGS	14B-7-717	N/A	N/A	-----
B.07.21	FIREBLOCKING/ DRAFTSTOPPING	14B-7-718	N/A	N/A	-----
B.08.01	INTERIOR FINISH: ROOMS/SPACES	TABLE 14B-8-803.13	CLASS C	COMPLIES	A-4004
B.08.02	INTERIOR FINISH: CORRIDORS / EXIT ACCESS	TABLE 14B-8-803.13	CLASS B	COMPLIES	A-4004
B.08.03	INTERIOR FINISH: EXIT / EXIT DISCHARGE	TABLE 14B-8-803.13	CLASS A	COMPLIES	A-4004
B.08.04	INTERIOR FLOOR FINISH (FIBROUS)	14B-8-804	CLASS I	COMPLIES	A-4004
B.09.02	AUTOMATIC SPRINKLER SYSTEM	14B-9-903.2	NOT REQUIRED	N/A	N/A
B.09.03	ALTERNATIVE AUTOMATIC EXTINGUISHING SYSTEM	14B-9-904.2	NOT REQUIRED	N/A	N/A
B.09.04	STANDPIPE SYSTEM	14B-9-905.3	NOT REQUIRED	N/A	N/A
B.09.05	PORTABLE FIRE EXTINGUISHERS	14B-9-906.1	2A @ 75'-0"	COMPLIES	G-1012
B.09.06	FIRE ALARM SYSTEM	14B-9-907.2	REQUIRED	COMPLIES	E-1104

ITEM	SUBJECT	CODE REFERENCE	ORDINANCE REQUIREMENT	ACTUAL	LOCATION / SHEET NO.
2019 CHICAGO BUILDING CODE REQUIREMENTS					
B.09.07	SINGLE-AND MULTIPLE-STATION SMOKE ALARMS	14B-9-907.2.10	REQUIRED	COMPLIES	-----
B.09.08	VISIBLE ALARM NOTIFICATION	14B-9-907.5.2.3	REQUIRED	COMPLIES	-----
B.09.09	SMOKE CONTROL SYSTEM	14B-9-909	NOT REQUIRED	N/A	-----
B.09.10	SMOKE AND HEAT REMOVAL	14B-9-910.2	NOT REQUIRED	N/A	-----
B.10.01	OCCUPANT LOAD CALCULATIONS SHOWN	14B-10-1004.1	REQUIRED	COMPLIES	G-1012
B.10.02	EGRESS CAPACITY CALCULATIONS SHOWN	14B-10-1005.1	REQUIRED	COMPLIES	G-1012
B.10.03	COMMON PATH OF EGRESS TRAVEL DISTANCE	TABLE 14B-10-1006.2.1	75 FEET	COMPLIES	G-1012
B.10.04	SINGLE EXIT CONDITION ALLOWED	14B-10-1006.3.2	ALLOWED	COMPLIES	NO CHANGE TO EXISTING
B.10.05	EXIT AND EXIT ACCESS SEPARATION	14B-10-1007.1	REQUIRED	COMPLIES	G-1012
B.10.06	ACCESSIBLE MEANS OF EGRESS	14B-10-1009	NO CHANGE	COMPLIES	G-1012
B.10.09	EXIT SIGNS	14B-10-1013		COMPLIES	NO CHANGE TO EXISTING
B.10.11	EXIT ACCESS TRAVEL DISTANCE	14B-10-1017.2	75'-0"	COMPLIES	G-1012
B.12.04	MINIMUM CEILING HEIGHT	14B-12-1207.2	7'-6"	COMPLIES	A-3000
B.14.01	EXTERIOR WALL COVERINGS - COMBUSTIBILITY	14B-14-1405.1	LIMITED	COMPLIES	-----
B.15.01	ROOF FIRE CLASSIFICATION	14B-15-1505.1	B	COMPLIES	SPECIFICATIONS
B.15.02	ROOFTOP STRUCTURE HEIGHT	14B-15-1510, 14B-15-1513	N/A	N/A	-----
B.15.03	ROOFTOP STRUCTURE AREA	14B-15-1510.1.1, 14B-15-1513.1.1	N/A	N/A	-----
B.15.04	ROOFTOP STRUCTURE MATERIALS	14B-15-1513.3	N/A	N/A	-----
B.15.05	ROOF COVERING SOLAR REFLECTANCE	14B-15-1515.2	0.72	COMPLIES	
B.27.01	ELECTRICAL ROOM FIRE RESISTANCE RATING	TABLE 14B-5-509, TITLE 14E	N/A	N/A	-----
B.27.02	ELECTRICAL ROOM NUMBER OF EXITS	14B-10-1006.2.2.7	N/A	N/A	-----
B.28.01	MECHANICAL ROOM FIRE-RESISTANCE RATING	TABLE 14B-5-509	N/A	N/A	-----
B.28.02	MECHANICAL ROOM NUMBER OF EXITS	14B-10-1006.2.2	N/A	N/A	-----
B.31.01	FENCE HEIGHT AND MATERIALS	14B-31-3114 (+ ZONING REQS)	NO CHANGE	N/A	-----



Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



CHICAGO TRANSIT
AUTHORITY

SENSITIVE SECURITY INFORMATION

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION, FOR U.S. GOVERNMENT AGENCIES. PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

RED LINE EXTENSION COMMUNITY OFFICE BUILDOUT

401 W 111TH STREET, CHICAGO, IL 60628


IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

	2024-07-25	MAINCON - ISSUE FOR BID
MARK	DATE	DESCRIPTION

BUILDING CODE MATRIX

G-1011

LIFE SAFETY PLAN PROVIDED FOR REFERENCE, INTERIOR BUILDOUT TO BE COMPLETED BY OTHERS

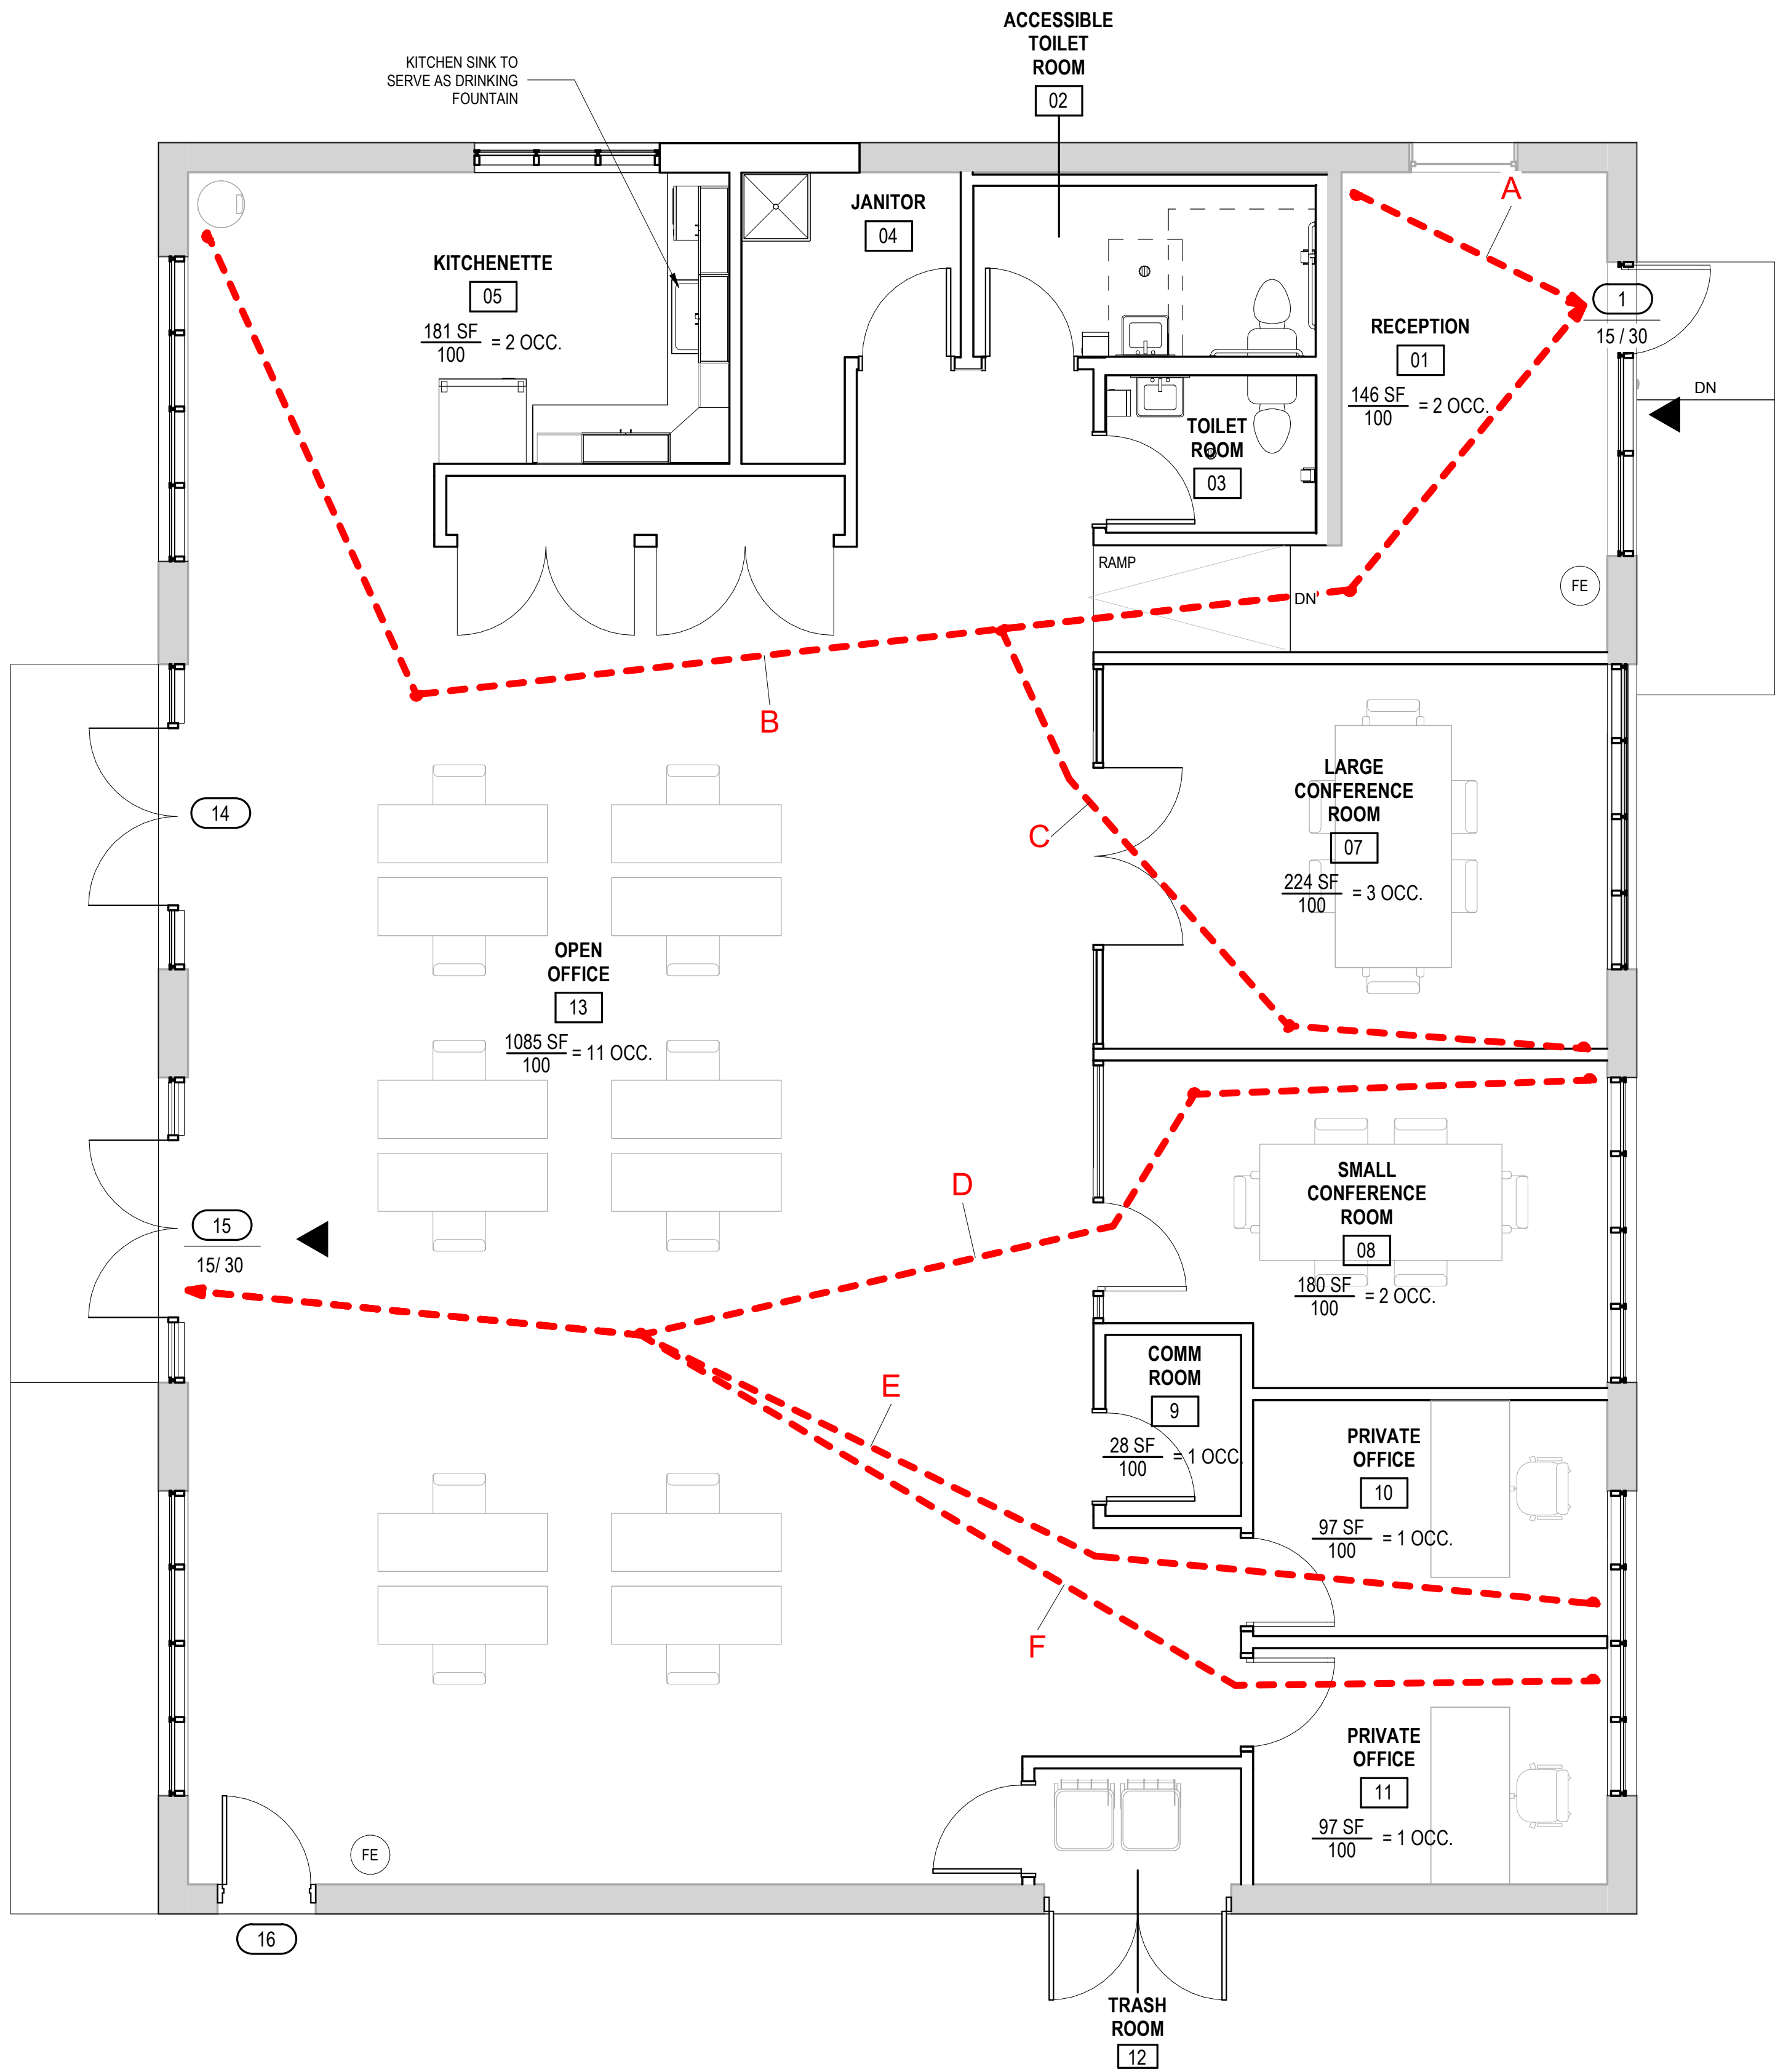

KEY :

- ▲ EGRESS EXIT
- A TRAVEL PATH ID
- TRAVEL PATH TO EXIT
- ROOM AREA
- 2500 NSF = 419 OCC. CALCULATED OCCUPANCY
- 6 SQFT OCCUPANCY LOAD FACTOR
- 101D EXIT LOCATION (DOOR NUMBER)
- 10 / 215 CALCULATED QUANTITY OF OCCUPANTS PER EXIT
- FE NEW FIRE EXTINGUISHER

OCCUPANCY NOTES:

EXISTING BUILDING AREA (NET SF): 3,000 SF
PROPOSED OCCUPANCY CLASSIFICATION: B [14B-3-304.1]
OCCUPANT LOAD FACTOR: 100 SF/OCCUPANT [14B-10-TABLE 1004.5]
OCCUPANT LOAD: 3000/100 = 30 OCCUPANTS
EGRESS CAPACITY REQUIRED @ .2IN./OCCUPANT: 22(.2) = 4.4 IN. (32 IN. MIN.) [14B-10-1005.3.2]
EGRESS CAPACITY PROVIDED: 72 IN.

PLUMBING COUNT:


PLUMBING OCCUPANT TABLE 18-29-403.1 BUSINESS B

OCCUPANCY COUNT 22 (CODE CALCULATED)

PER TABLE 403.1		
FIXTURE	REQUIRED	PROVIDED
WATER CLOSET	2 (ALL GENDER)	2 (ALL GENDER)
LAVATORIES	1 (ALL GENDER)	2 (ALL GENDER)
DRINKING FOUNTAIN	1	1
SERVICE SINK	1	1

PATH OF TRAVEL SCHEDULE			
MARK	FROM ROOM	LENGTH	ALLOWED
A	RECEPTION 01	8'-7"	75'-0"
B	KITCHENETTE 05	61'-4"	75'-0"
C	LARGE CONFERENCE ROOM 07	51'-2"	
D	SMALL CONFERENCE ROOM 08	50'-6"	75'-0"
E	PRIVATE OFFICE 10	49'-6"	75'-0"
F	PRIVATE OFFICE 11	50'-11"	75'-0"

1 LIFE SAFETY PLAN
1/4" = 1'-0"

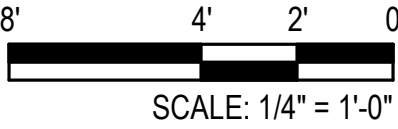

Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



SENSITIVE SECURITY INFORMATION
WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION, FOR U.S. GOVERNMENT AGENCIES, PUBLIC. DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED. CTA ASSUMES NO RISK OF LIABILITY FOR ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY SCALING OF THIS DRAWING.

RED LINE EXTENSION
COMMUNITY OFFICE BUILDOUT


401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt


MARK	DATE	DESCRIPTION
	2024-07-25	MAINCON - ISSUE FOR BID

LIFE SAFETY PLAN

G-1012

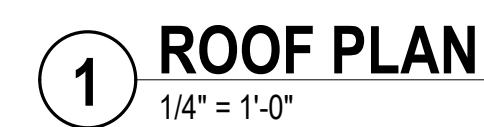

1. REMOVE EXISTING ROOFING SYSTEM (CAP SHEET, ALL PIPES, ALL ROOF SYSTEM AND INSULATION) DOWN TO EXISTING ROOF DECK. PROVIDE NEW ROOFING SYSTEM WITH MIN R-30 TAPERED INSULATION. SEE DETAIL SHEET A-5000 AND ROOF NOTES.
2. REF PLUMB & MECH DRAWINGS FOR ROOF DRAIN AND EQUIPMENT REQUIREMENT INFORMATION
3. MODIFIED BITUMEN IS CTA TYPICAL ROOF SYSTEM. ROOF SYSTEM TO BE FIRE RATED AS REQUIRED BY CODE AND CTA INFRASTRUCTURE DESIGN CRITERIA MANUAL.
4. CONTRACTOR TO USE PRE-FINISHED ALUMINIUM FLASHING, COUNTERFLASHING, TRIM AND ACCESSORIES AS REQUIRED.
5. SLOPE ROOF TO GUTTER; USE TAPERED INSULATION (1/8" PER FOOT TAPER).



WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.


DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.


401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

[illegible]

A-1001

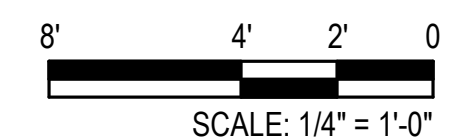




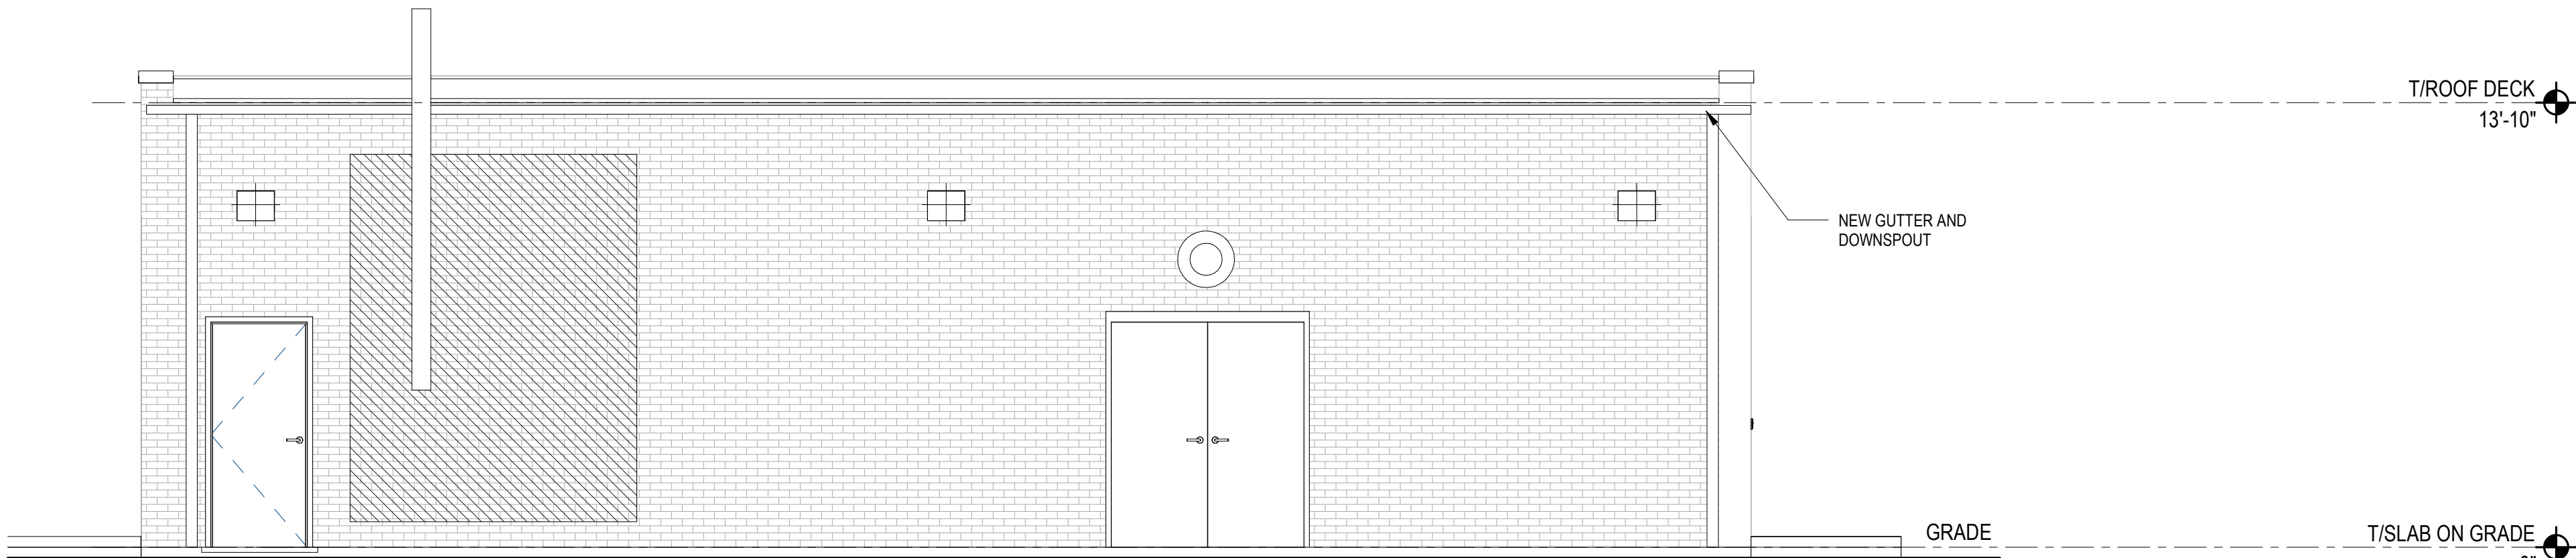


3 SOUTH ELEVATION
1/4" = 1'-0"

ELEVATION NOTES


1. MATERIAL FINISH LEGEND, SEE SHEET A-4004.

LEGEND ELEVATION


-  NEW WALL SCONCE, REF ELEC
-  WINDOW NUMBER
-  WINDOW TAG
-  WALL MOUNTED CAMERA

LEGEND KEYNOTE

N1	REMOVE AND REPLACE CRACKED, SPALLED, OR OTHERWISE DAMAGED BRICK WITH NEW TO MATCH EXISTING
N2	REPAIR/REPLACE DAMAGED MASONRY UNITS AT LOCATION OF EXISTING LIGHT FIXTURE BEING REMOVED AND PREPARE AREA FOR NEW LIGHT FIXTURE, REF ELEC.
N3	REPAIR/PEPLACE DAMAGED MASONRY UNITS AT LOCATION OF EXISTING CAMERA BEING REMOVED AND PREPARE AREA FOR NEW CCTV CAMERA BY OWNER.

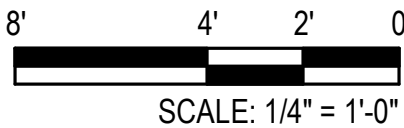

Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.

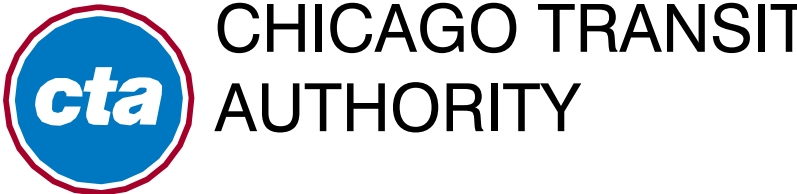

SENSITIVE SECURITY INFORMATION

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN 49 CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION, FOR U.S. GOVERNMENT AGENCIES. PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED. CTA ASSUMES NO RISK OF LIABILITY FOR ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY SCALING OF THIS DRAWING.

**RED LINE EXTENSION
COMMUNITY OFFICE BUILDOUT**


401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt


MARK	DATE	DESCRIPTION
	2024-07-25	MAINCON - ISSUE FOR BID

BUILDING ELEVATIONS


A-2000

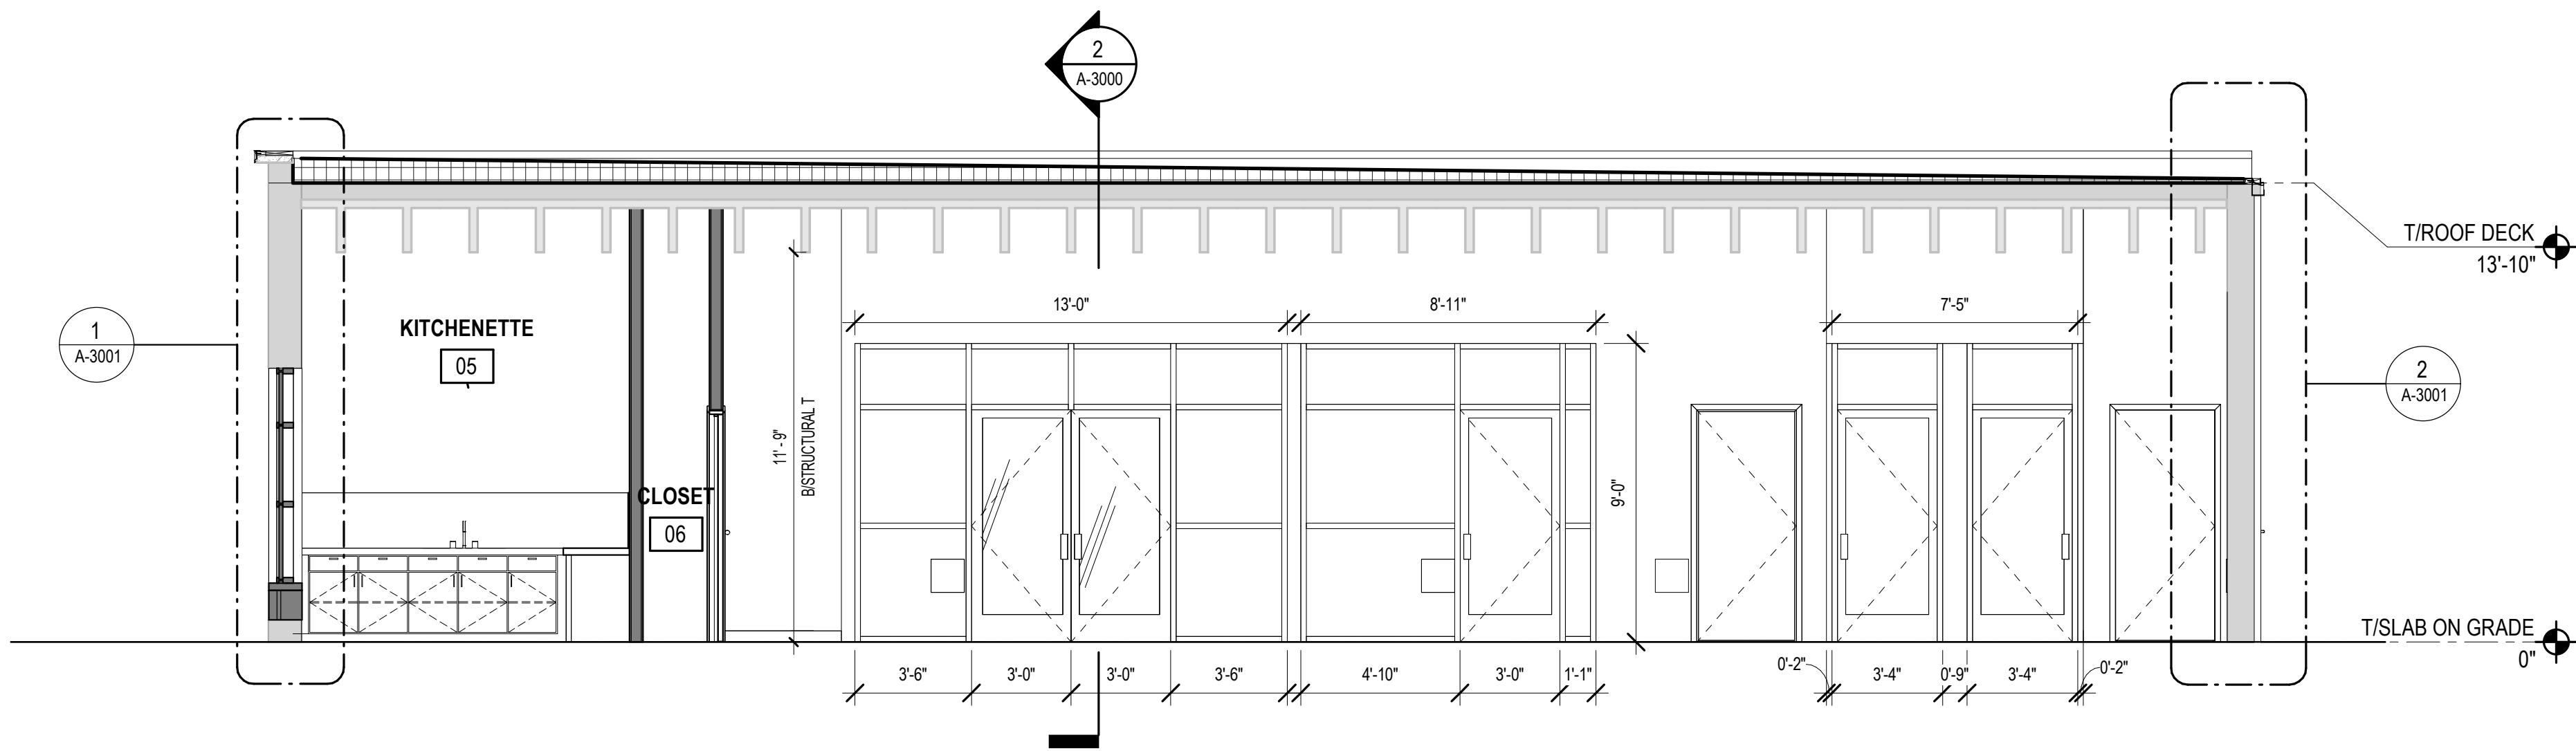

1 NORTH-SOUTH SECTION
1/4" = 1'-0"

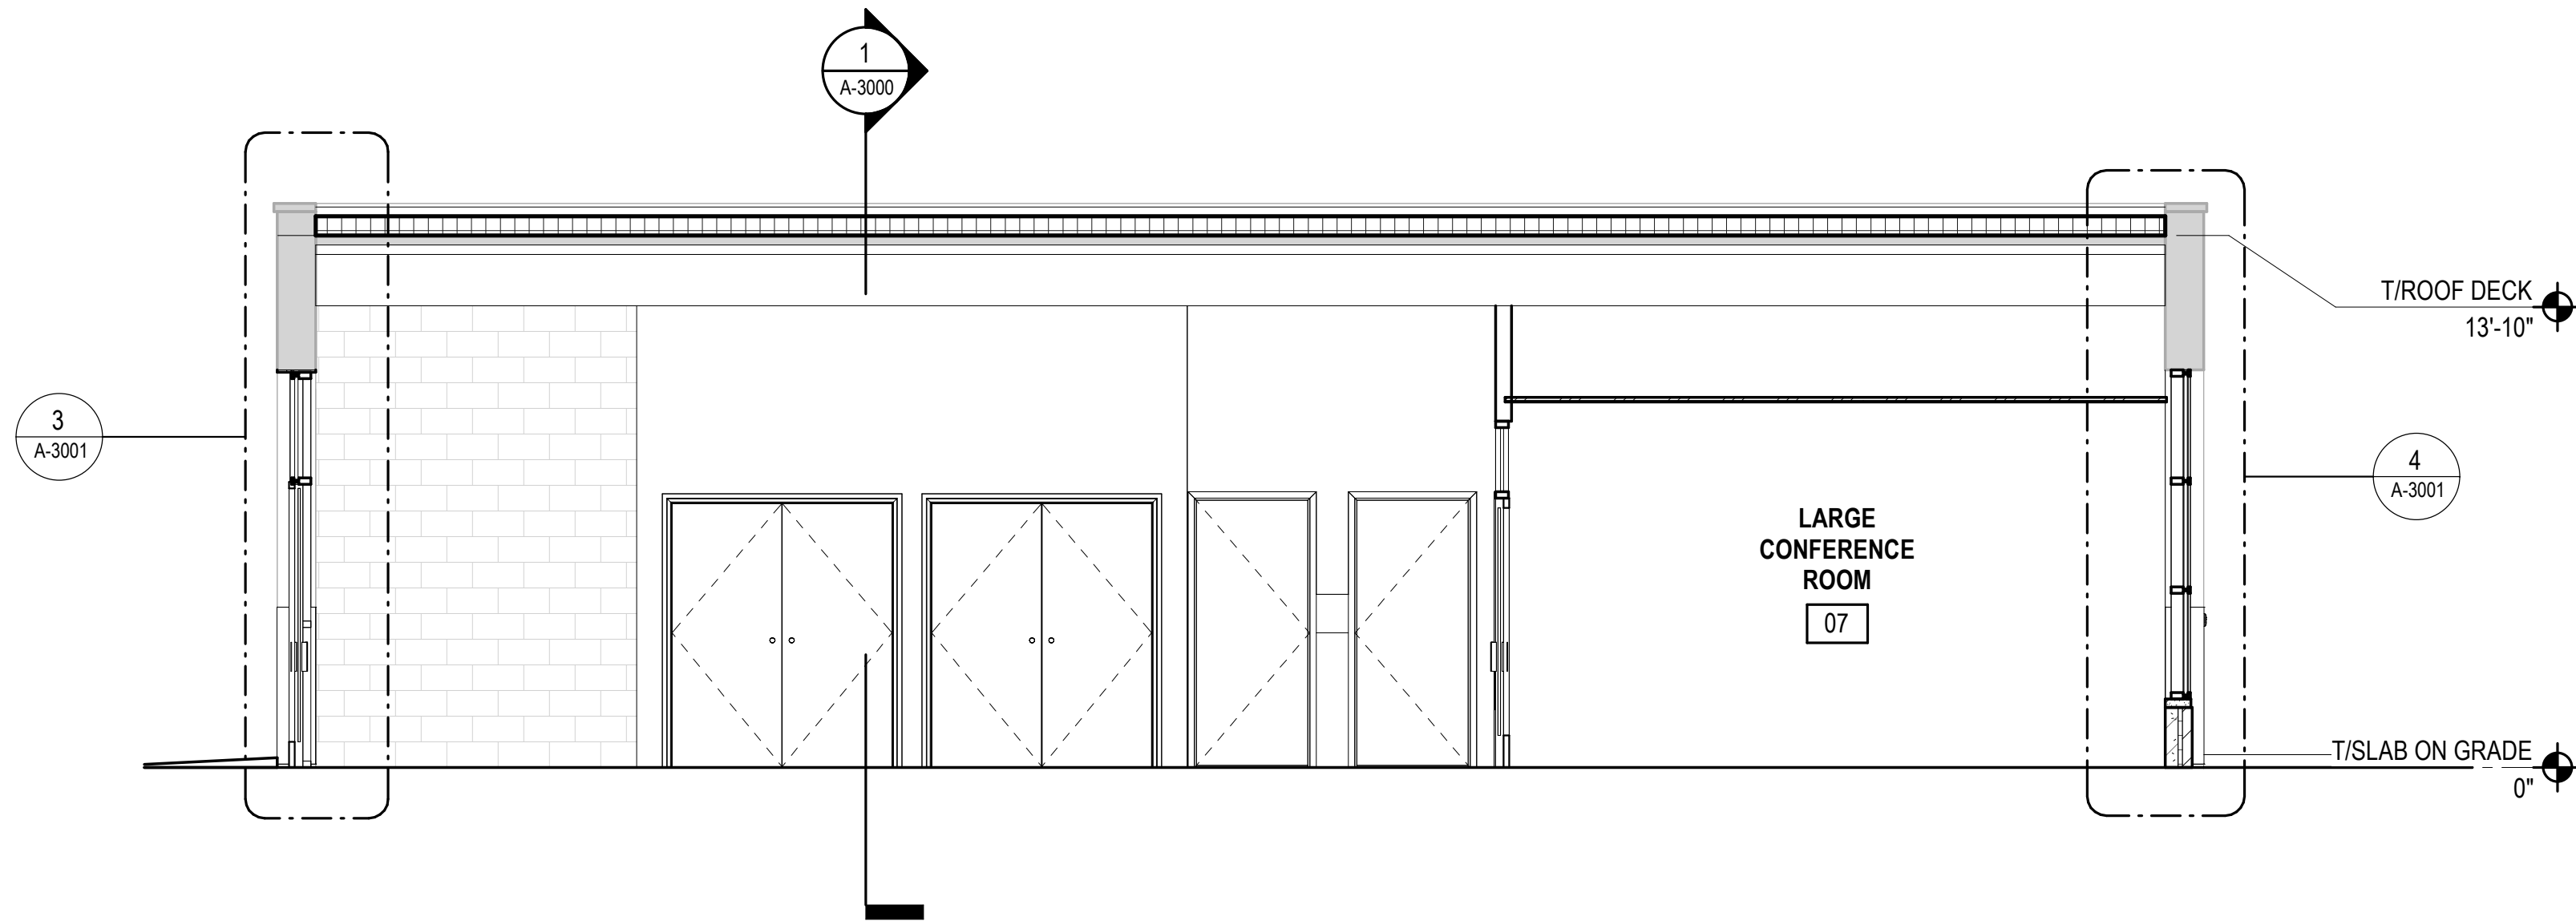

2 EAST-WEST SECTION
1/4" = 1'-0"

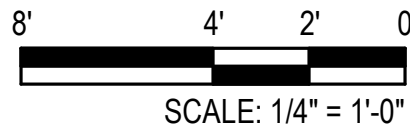

Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



SENSITIVE SECURITY INFORMATION
WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN 49 CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION, FOR U.S. GOVERNMENT AGENCIES, PUBLIC. DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

RED LINE EXTENSION COMMUNITY OFFICE BUILDOUT


401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

MARK	DATE	DESCRIPTION
	2024-07-25	MAINCON - ISSUE FOR BID

BUILDING SECTIONS

A-3000

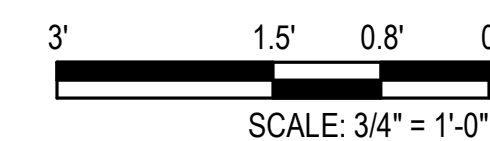

Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



SENSITIVE SECURITY INFORMATION

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

RED LINE EXTENSION COMMUNITY OFFICE BUILDOUT

401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt


[illegible]

WALL SECTIONS


A-3001

Autodesk Docs://23-0601_CTA RLE Community Office/23-0601_CTA RLE Community Office_P23.rvt


7/23/2024 1:42:48 PM

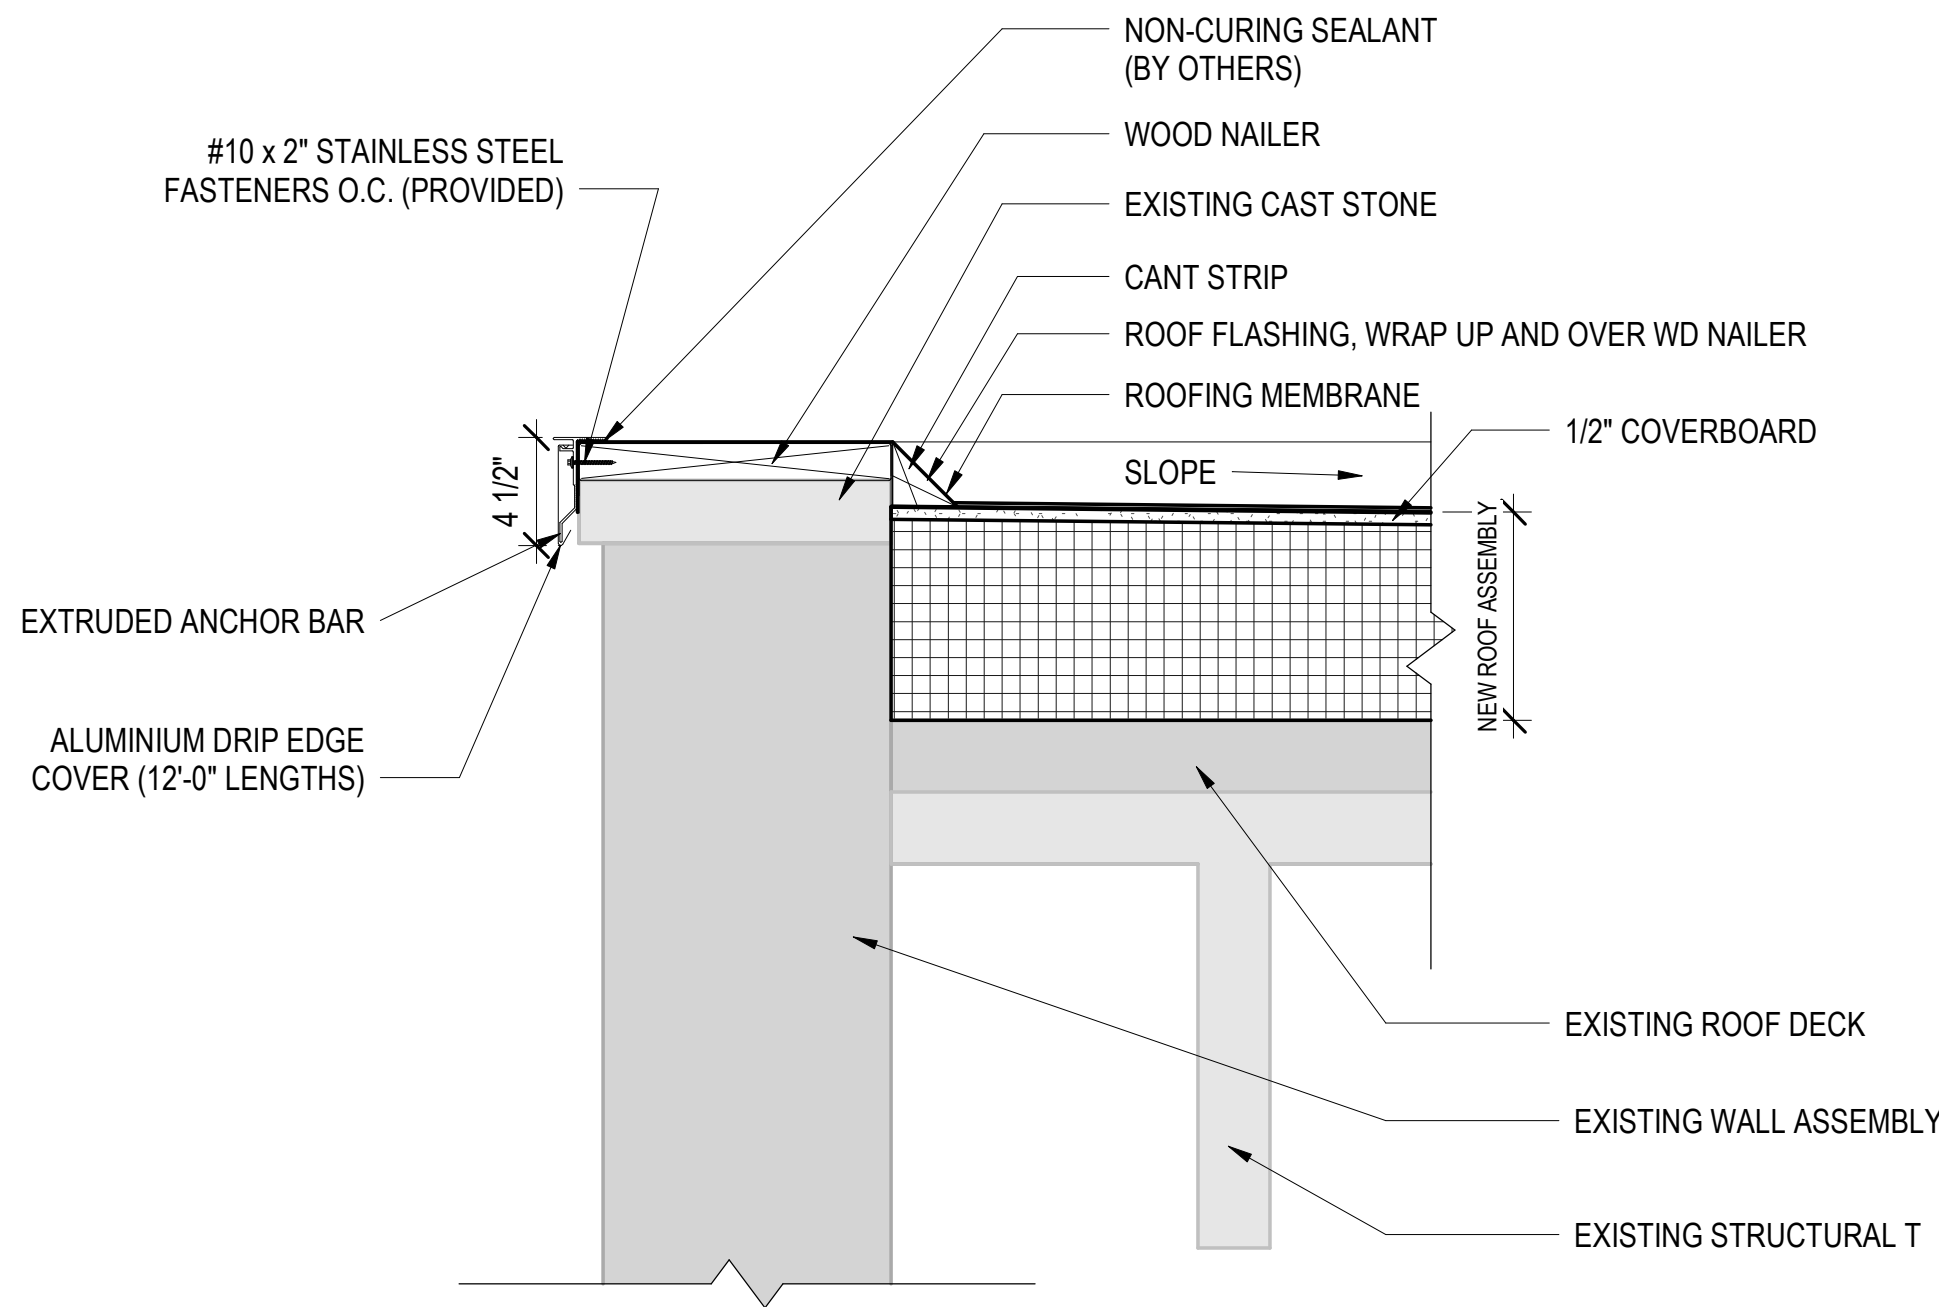


1 DETAIL @ ROOF
1 1/2" = 1'-0"

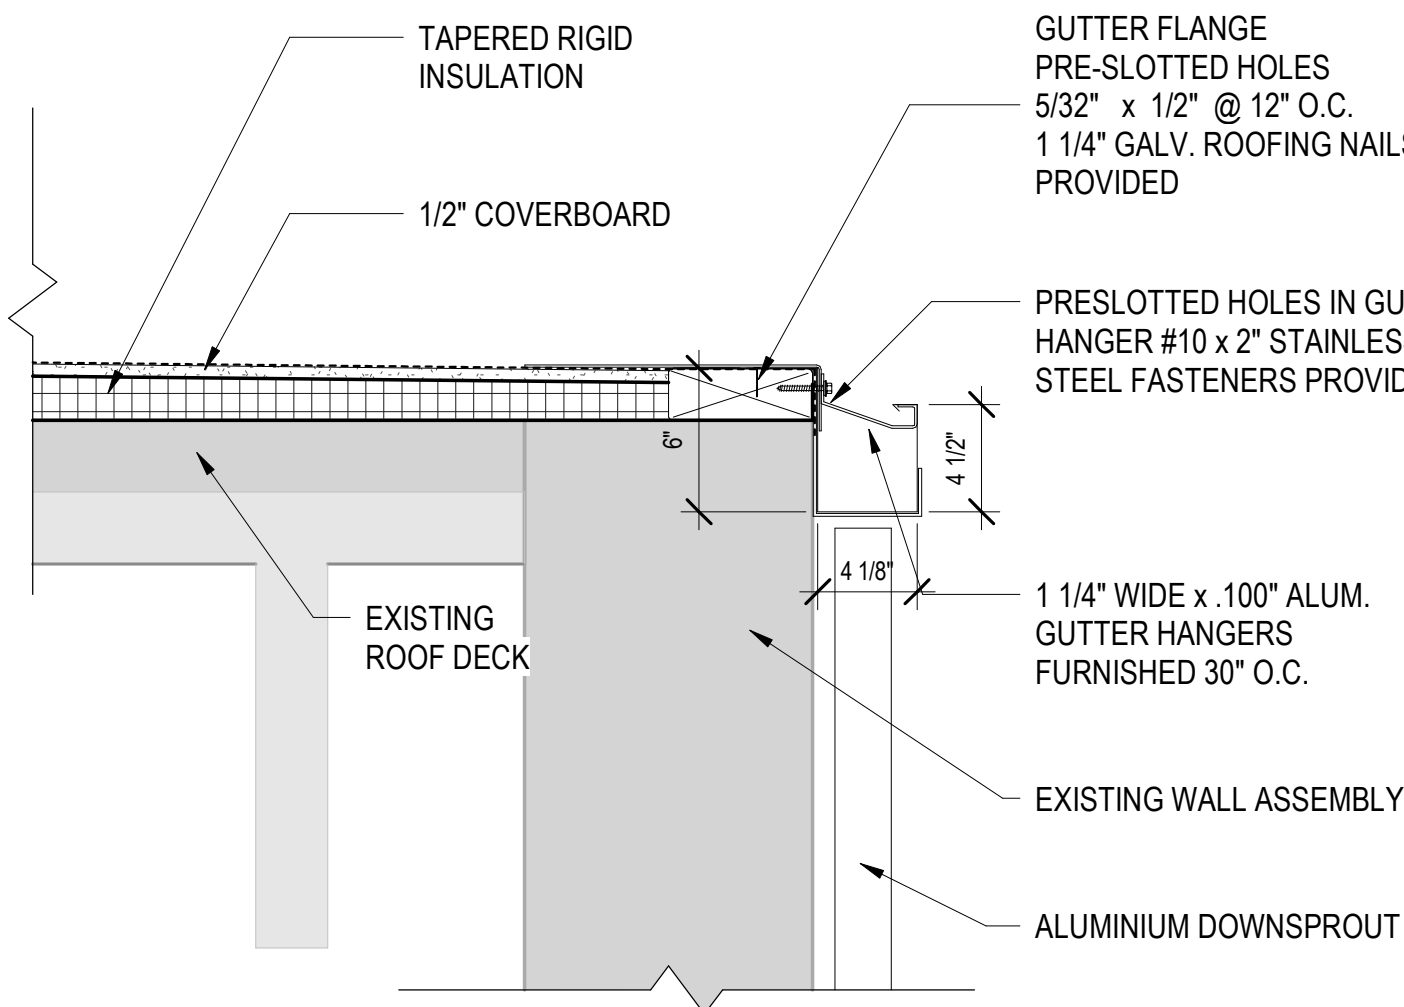

2 DETAIL @ ROOF GUTTER
1 1/2" = 1'-0"

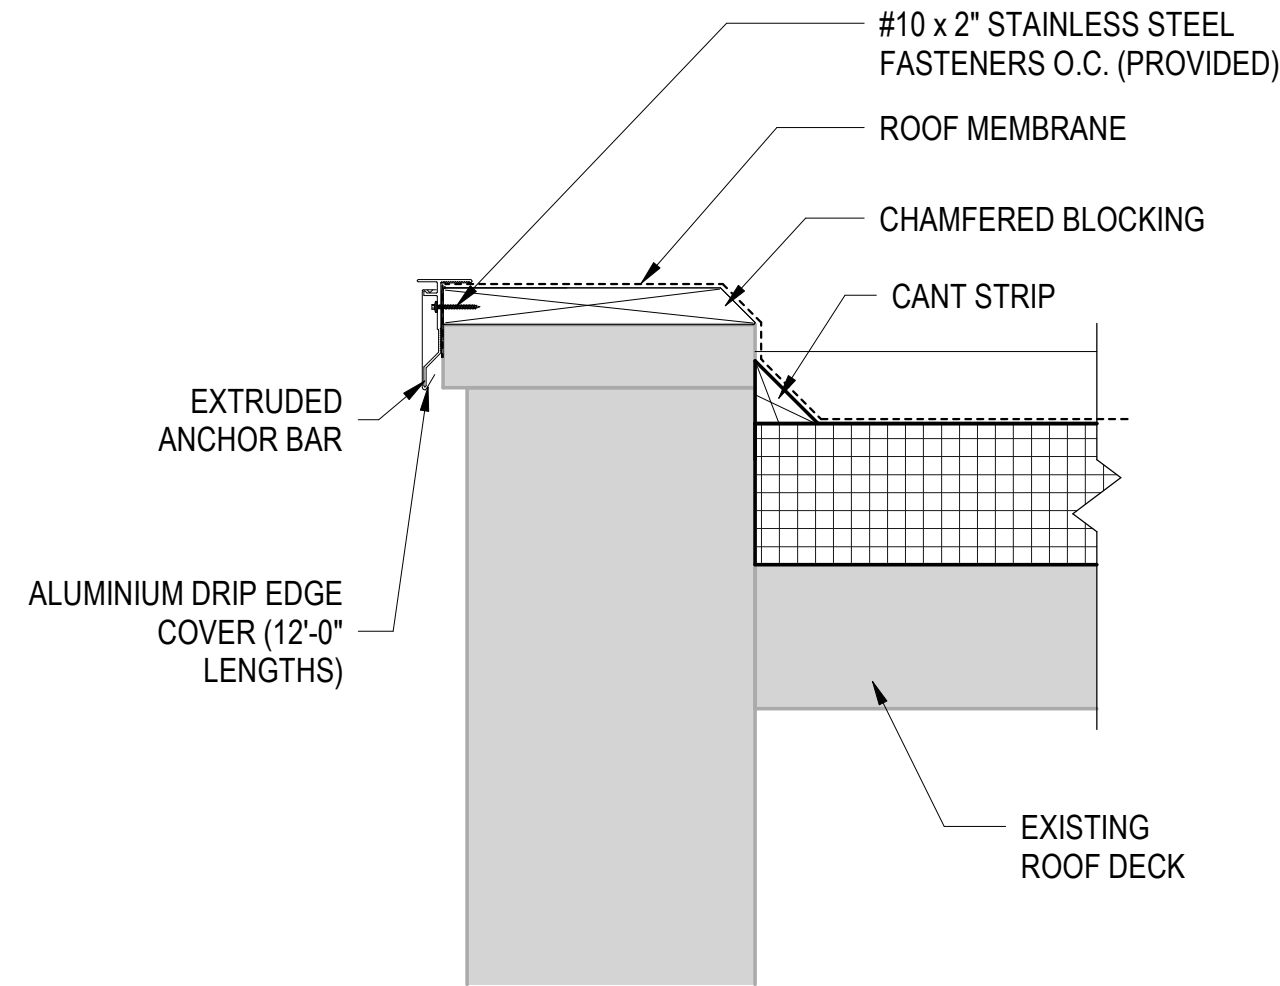


3 DETAIL @ SIDEWALL PARAPETS
1 1/2" = 1'-0"

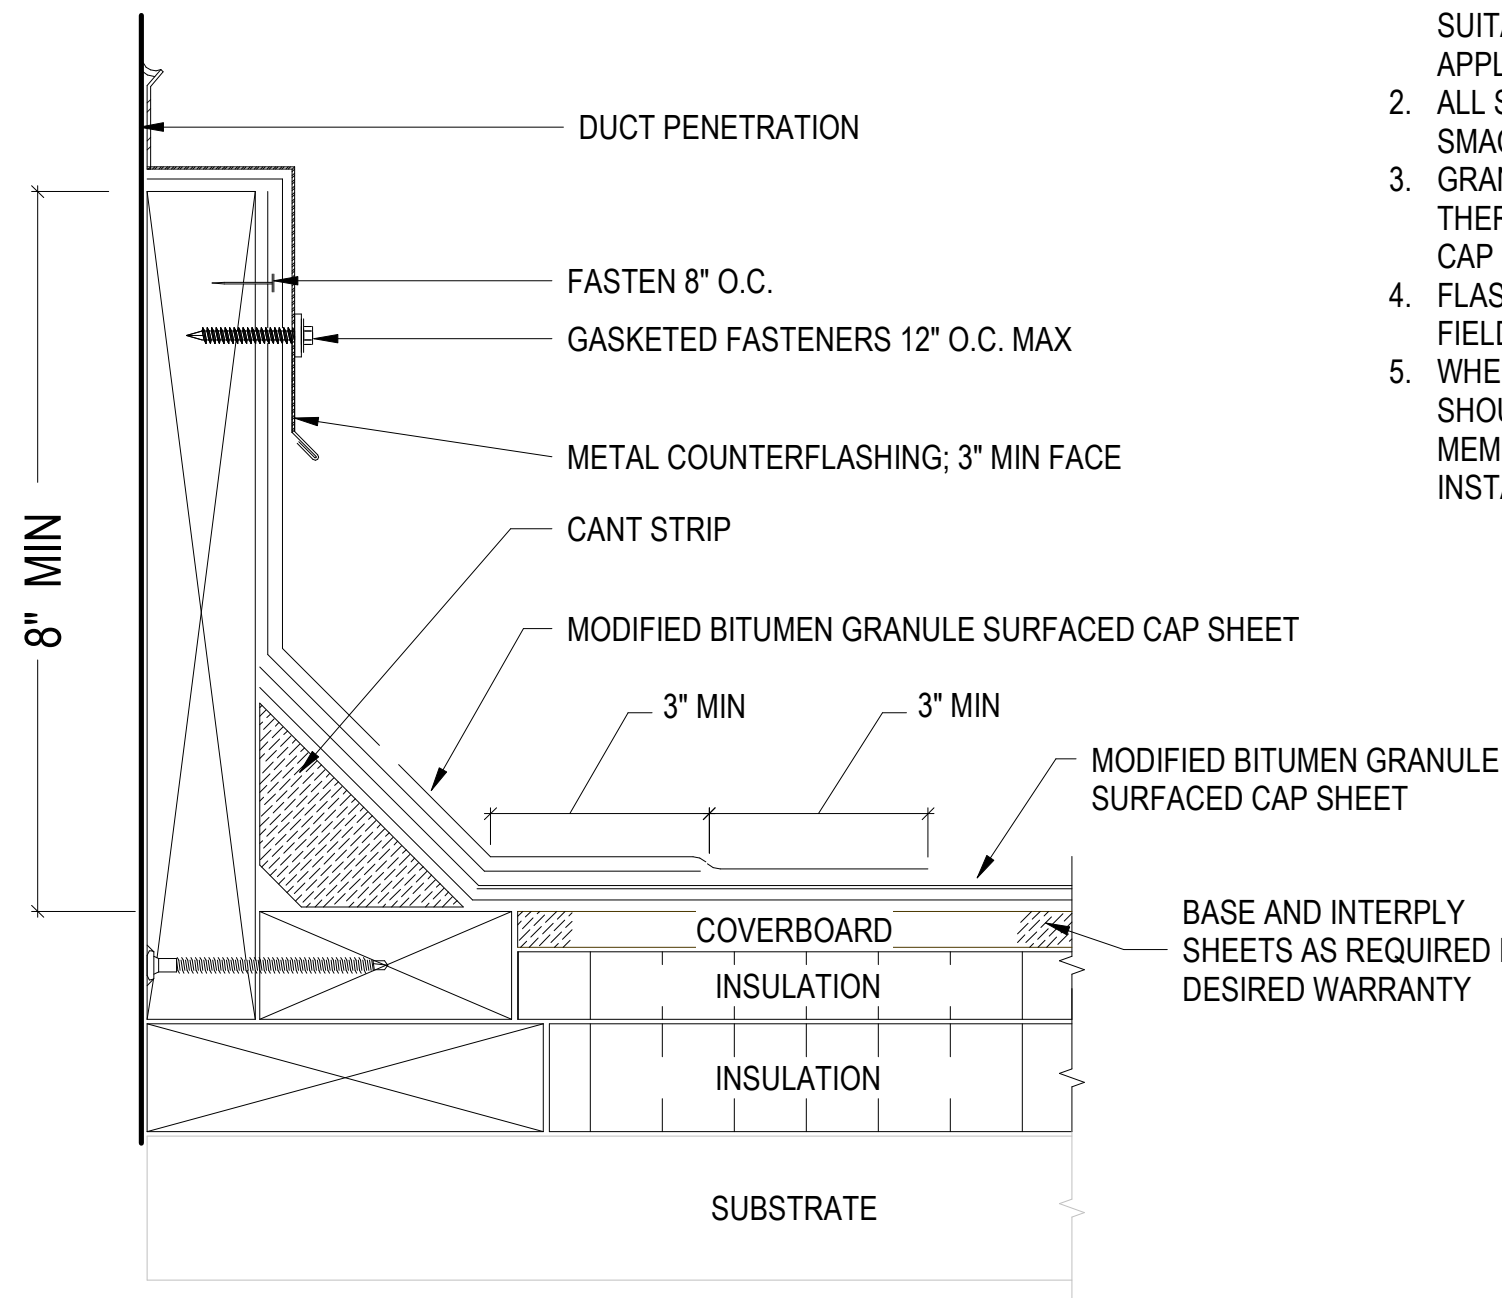

6 DETAIL @ ROOF PENETRATION
N.T.S.

NOTES:

- WOOD NAILERS MUST BE INSTALLED WITH SUITABLE FASTENERS TO MEET APPLICABLE BUILDING CODES.
- ALL SHEET METAL IS TO BE INSTALLED PER SMACNA GUIDELINES.
- GRANULES MUST BE EMBEDDED WHEN THERMALLY FUSING GRANULE SURFACED CAP SHEET.
- FLASHING LAPS MUST BE OFFSET FORM FIELD LAPS BY A MINIMUM OF 12" (305MM).
- WHEN POSSIBLE, MECHANICAL UNITS SHOULD NOT BE SET UNTIL THE REOF MEMBRANE AND FLASHING HAVE BEEN INSTALLED.

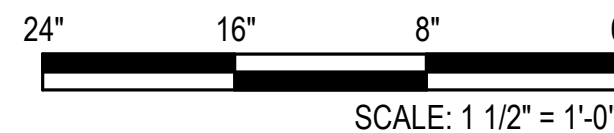

Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



SENSITIVE SECURITY INFORMATION
WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN 49 CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION, FOR U.S. GOVERNMENT AGENCIES, PUBLIC. DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED. CTA ASSUMES NO RISK OF LIABILITY FOR ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY SCALING OF THIS DRAWING.

**RED LINE EXTENSION
COMMUNITY OFFICE BUILDOUT**

401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	EF
CHECKED BY	JC
DESIGNED BY	M2
DRAWN BY	PT
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

MARK	2024-07-25 DATE	MAINCON - ISSUE FOR BID DESCRIPTION
------	--------------------	--


DETAILS

A-5000



STRUCTURAL GENERAL NOTES

**ALL ROOF PENETRATIONS TO BE
COMPLETED BY ROOFING
CONTRACTOR UNDER MAINCON
PACKAGE, SHEET PROVIDED FOR
REFERENCE ONLY FOR CTA
TRADES DRAWING**



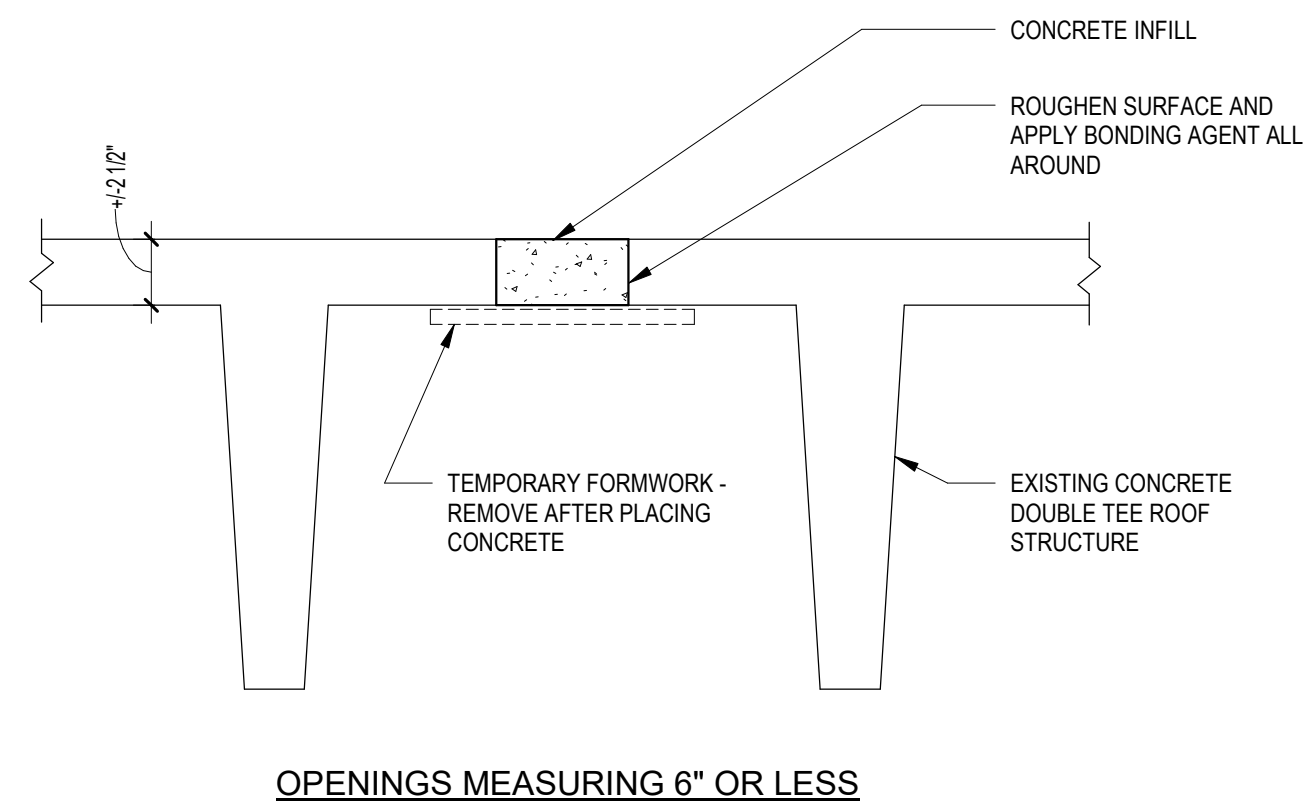

2 INFILLS AT CONCRETE ROOF STRUCTURE

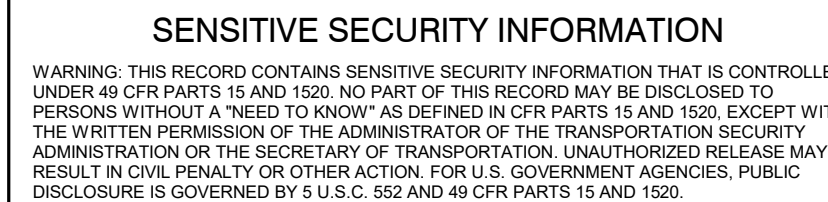

DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

RED LINE EXTENSION COMMUNITY OFFICE BUILDOUT

401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	TH
CHECKED BY	TH
DESIGNED BY	TH
DRAWN BY	SC
PROJECT NO.	2019-0017.06
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

[illegible]

STRUCTURAL DETAILS

SB-2001

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)

7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.

2. ALL NEW DUCTWORK SHALL BE FABRICATED FROM PRIME FIRST QUALITY GALVANIZED SHEET METAL, UNLESS OTHERWISE NOTED. GAUGES OF METAL, HANGER SPACING, ETC. SHALL CONFORM TO THE LATEST EDITION OF SMACNA HVAC DUCT CONSTRUCTION STANDARDS FOR DUCT CONSTRUCTION (18-28-603.3).

3. PROVIDE MANUAL LOCKING TYPE VOLUME DAMPERS IN ALL BRANCH DUCTWORK TO AIR DIFFUSERS, REGISTERS AND GRILLES. (18-28-603.15)

4. ALL FLEXIBLE LOW-PRESSURE DUCTWORK SHALL BE INSULATED, CHICAGO APPROVED AND NOT EXCEED 5'-0" IN LENGTH. MANUFACTURER TO BE WIREMOLD, TYPE WK UL-181, CLASS 1.

5. PROVIDE TURNING VANES IN ALL 90-DEGREE DUCT TURNS.

6. TRANSFER DUCTS SHALL NOT EXCEED 5'-0" IN LENGTH.

7. ALL AIR MOVING EQUIPMENT SHALL BE INSTALLED WITH VIBRATION ISOLATORS AND PROVIDED WITH FLEXIBLE DUCT CONNECTIONS.

8. ALL EQUIPMENT SHALL HAVE TOTALLY ENCLOSED MOTORS AND BE RATED TO OPERATE IN PLENUM CEILINGS, INCLUDING ALL SUPPLY AIR AND RETURN AIR FAN MOTORS EXPOSED TO THE AIR STREAM.

9. THE MAXIMUM SOUND PRESSURE LEVEL, "A-SCALE LEVELS", AT THE PROPERTY LINE BORDERING RESIDENTIAL AREAS SHALL NOT EXCEED 55 DECIBELS (dB) FOR HVAC EQUIPMENT INSTALLED UNDER THIS CONTRACT.

10. OUTSIDE AIR INTAKES SHALL BE AT LEAST 10'-0" ABOVE GRADE AND A MINIMUM OF 15'-0" FROM ALL EXHAUST AIR AND SOURCES OF CONTAMINATION. MAXIMUM VELOCITY THROUGH OUTSIDE AIR LOUVERS AND DUCTWORK SHALL NOT EXCEED 1000 FPM.

11. ALL FLUES SHALL TERMINATE 6'-0" ABOVE THE ROOFLINE.

12. STRAINERS, ISOLATION VALVES AND BALANCE VALVES SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

13. PROVIDE MANUAL AIR VENTS TO ALL HIGH POINTS IN PIPING.

14. ALL EXPANSION VALVES, DEVICES AND CONNECTIONS SHALL BE REMOVED FROM THE AIRSTREAM OF ALL MECHANICAL EQUIPMENT AS PER CITY OF CHICAGO CODE. (13-192-380)

CHICAGO ENERGY NOTES

1. MINIMUM EQUIPMENT COOLNG EFFICIENCIES SHALL MEET ASHRAE 90.1-2019.

2. ALL ROOFTOP UNITS AND AIR HANDLERS SHALL BE FURNISHED WITH ECONOMIZERS.

3. MOTORIZED DAMPERS SHALL BE INSTALLED ON ALL OUTSIDE AIR INTAKES AND EXHAUST OPENINGS UNLESS NOTED OTHERWISE.

4. MAXIMUM FAN NAMEPLATE HORSEPOWER SHALL NOT EXCEED ASHRAE 90.1-2019.

5. LOAD CALCULATIONS WERE BASED ON ASHRE 2017 FUNDAMENTALS.

6. ALL PROGRAMMABLE THERMOSTATS SHALL ALLOW FOR 5 DEGREE DEADBAND, 7-DAY CLOCK, 2-HOUR MANUAL OVERRIDE, 10 HOUR BACKUP AND SETBACK CAPABLE OF 55 DEGREES HEATING AND 85 DEGREES COOLING. (EXCEPT CONTINUOUS OPERATING ZONES)


7. DUCT INSULATION AS SPECIFIED WITH MINIMUM VALUES AS FOLLOWS:

- R-6 SUPPLY AND RETURN DUCT INSULATION IN UNCONDITIONED SPACES.

- R-8 SUPPLY AND RETURN DUCT INSULATION FOR EXTERIOR DUCTS.

8. ALL DUCTWORK SHALL BE SEALED PER SPECIFICATIONS. PRESSURE SENSITIVE TAPE SHALL NOT BE USED AS THE PRIMARY SEALANT.

1. ALL WORK PERFORMED AND EQUIPMENT INSTALLED UNDER THIS CONTRACT SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CITY OF CHICAGO CODES.



12' 6' 3' 0'

SCALE: $\frac{3}{16}" = 1'-0"$



Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.


DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

401 W 111TH STREET, CHICAGO, IL 60628



IN CHARGE	JC
APPROVED BY	RH
CHECKED BY	MM
DESIGNED BY	RH
DRAWN BY	NG
PROJECT NO.	2019-0017.06.
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

[illegible]

M-1001

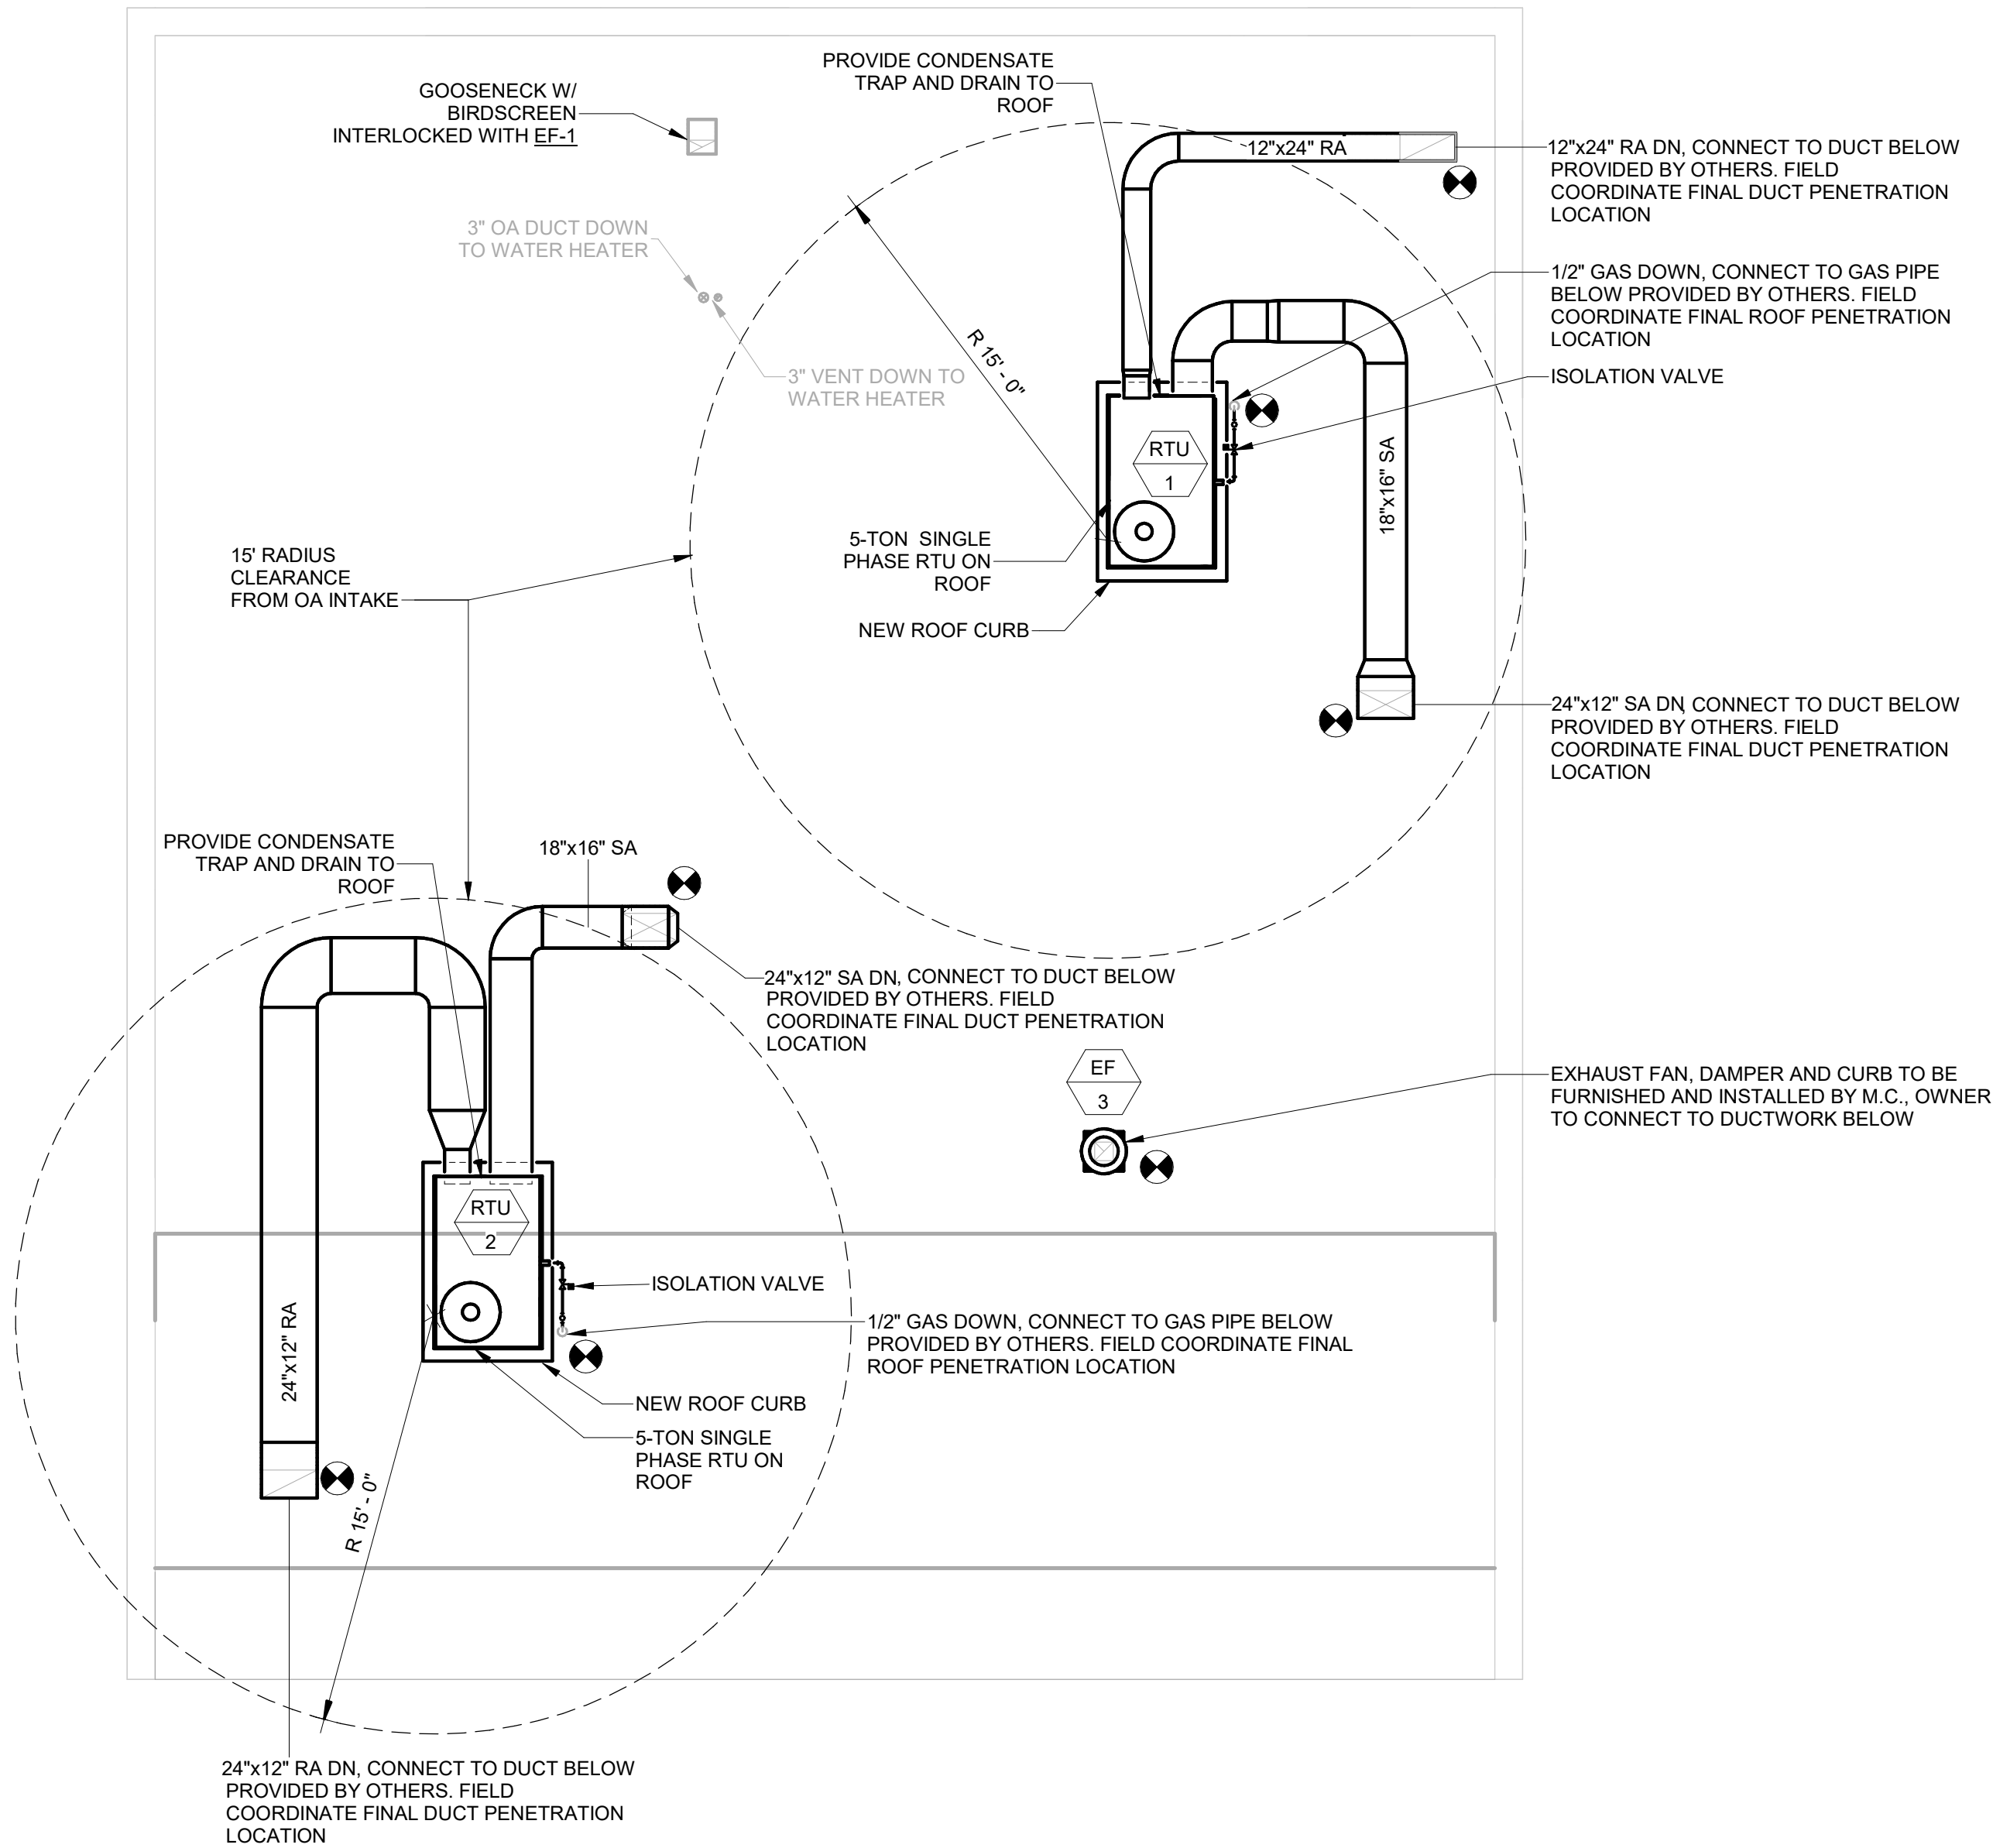

1 ROOF HVAC PLAN
3/16" = 1'-0"

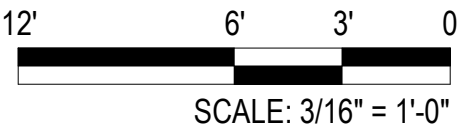

SINGH M
SINGH + ASSOCIATES, INC.
CONSULTING ENGINEERS

700 N Sangamon
Chicago, IL 60642
312.432.4180
312.432.4184
MULLER2
© 2024 Muller & Muller, Ltd.

Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



**CHICAGO TRANSIT
AUTHORITY**

SENSITIVE SECURITY INFORMATION

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION, FOR U.S. GOVERNMENT AGENCIES. PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

**RED LINE EXTENSION
COMMUNITY OFFICE BUILDOUT**

401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	RH
CHECKED BY	MM
DESIGNED BY	RH
DRAWN BY	NG
PROJECT NO.	2019-0017.06.
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

MARK	DATE	DESCRIPTION
	2024-07-25	MAINCON - ISSUE FOR BID

ROOF HVAC PLAN

M-1002

Autodesk Docs://23-0601_CTA RLE Community Office/23-0601_CTA RLE Community Office MEP_R23.rvt

ROOF TOP UNIT SCHEDULE																										
TAG	LOCATION	AREA SERVED	FAN CAPACITY CFM	MIN. OA	FAN E.S.P. IN. WC.	DX COOLING							HEATING COIL					ELECTRICAL					MODEL	MANUFACTURER	OPERATING WEIGHT LBS	NOTES
						EAT DB °F	EAT WB °F	LAT DB °F	LAT WB °F	REFRIG. TYPE.	TOTAL COOLING CAPACITY MBH	SENSIBLE COOLING CAPACITY MBH	INPUT HEATING CAPACITY MBH	OUTPUT HEATING CAPACITY MBH	EAT DB °F	LAT DB °F	SUPPLY FAN		TOTAL UNIT							
																	QTY	HP	V	PH	HZ					
RTU-1	ROOF	RM 01 - RECEPTION, RM 07 - LARGE CONFERENCE ROOM, RM 08- SMALL CONFERENCE RM, RM 10-PRIVATE OFFICE, RM 11 - PRIVATE ROOM	1600	347	0.90	80.0	67.0	58.5	57.2	R-410A	105	46	1590	90	73	70.0	103.8	1	1.50	208	1	60	48FCEA06A2A 3-0A1C0	CARRIER	794	SEE BELOW
RTU-2	ROOF	RM 02 ACC TOLIET ROOM, RM 03- TOLIET ROOM, RM 04- JANITOR, RM 05 - KITCHENETTE, RM 13 - OPEN OFFICE	2080	347	0.90	80.0	67.0	58.5	57.2	R-410A	105	46	1590	90	73	70.0	103.8	1	1.50	208	1	60	48FCEA06A2A 3-0A1C0	CARRIER	794	SEE BELOW


- NOTES:
1. PROVIDE FACTORY WIRED DISCONNECT SWITCH IN A NEMA 3R ENCLOSURE. POWER SHALL BE A SINGLE POINT CONNECTION. WIRING SHALL COMPLY WITH CITY OF CHICAGO CODE.
 2. PROVIDE VIBRATION CURB (MIN 12 INCH HIGH) W/ ADJUSTABLE ISOLATOR FOR MINIMUM 2 INCH DEFLECTION.
 3. PRE-FILTERS: 30% 2 INCH THICK DISPOSABLE TYPE, FINAL FILTERS: 12 INCH THICK CARTRIDGE TYPE MERV 13. PROVIDE 2 SETS OF FILTERS. INCLUDED 1 INCH PRESSURE DROP FOR DIRTY FILTER ALLOWANCE.
 4. MAXIMUM FACE VELOCITY ON A COIL SHALL NOT EXCEED 500 FPM.
 5. PROVIDE WITH FIELD INSTALLED DAMPER, GAS VALVE WITH MIN. 2 STAGE HEATING, SUPPLY, AND RETURN DUCT SMOKE DETECTORS, AND CONVENIENCE OUTLET.
 6. PROVIDE WITH OPEN-PROTOCOL DDC CONTROL SYSTEM WITH WALL-MOUNTED PROGRAMMABLE THERMOSTATS

EXHAUST FAN SCHEDULE															
TAG	LOCATION	AREA SERVED	CFM	ESP (IN. W.C.)	DRIVE TYPE	MOTOR						MANUFACTURER	MODEL	WEIGHT	NOTES
						RPM	HP	BHP	V	PH	HZ				
EF-1	RM 02 - ACC TOLIET RM	RM 02 ACC TOLIET ROOM, RM 03- TOLIET ROOM, RM 04- JANITOR	320	0.25	DIRECT	1413	0.17	0.03	208	1	60	GREENHECK	SQ-80-VG	49	3,4
EF-2	RM 12 - TRASH ROOM	RM 12 - TRASH ROOM	75	0.25	DIRECT	1563	0.07	0.02	208	1	60	GREENHECK	SQ-60-VG	30	1,3
EF-3	ROOF	RM 09 - COMMUNICATIONS	75	0.25	DIRECT	1639	0.07	0.01	208	1	60	GREENHECK	G-060-VG	19	1,2

- NOTES:
1. PROVIDE UNIT WITH DISCONNECT SWITCH AND BACKDRAFT DAMPER
 2. PROVIDE UNIT COMPLETE WITH 14" HIGH ROOF CURB.
 3. SUSPENDED FAN WITH SPRING VIBRATION ISOLATOR.
 4. PROVIDE WITH DISCONNECT SWITCH AND MOTORIZED BACKDRAFT DAMPER TO BE INSTALLED AT ROOF PENETRATION AND POWERED FROM FAN TO ENSURE DAMPER IS OPEN WHEN FAN IS ON AND CLOSED WHEN FAN IS OFF.


GRILLES, REGISTERS AND DIFFUSERS SCHEDULE							
TYPE	SYSTEM	MANUFACTURER	MODEL NO.	VOLUME DAMPER	MATERIAL DESCRIPTION	FINISH	SPECIFICATION
A	SUPPLY/RETURN DIFFUSER	TITUS	OMNI	NONE	STEEL	BY ARCHITECT	PLAQUE FACE DIFFUSER, 360 DEGREE THROW, LAY-IN CEILING
B	SUPPLY GRILLE	TITUS	300FL	OPPOSED BLADE DAMPER	STEEL	BY ARCHITECT	DOUBLE DEFLECTION REGISTER WITH FRONT BLADES PARALLEL TO LONG DIMENSION. 3/4" SPACING.
C	TRANSFER/EXHAUST/RE TURN GRILLE	TITUS	350FL	OPPOSED BLADE DAMPER	STEEL	BY ARCHITECT	35 DEG. FIXED DEFLECTION REGISTER WITH BLADES PARALLEL TO LONG DIMENSION. 3/4" SPACING.
D	TRANSFER DOOR GRILLE	TITUS	T-700L	OPPOSED BLADE DAMPER	STEEL	BY ARCHITECT	SIGHT PROOF GRILLE WITH INVERTED-V BLADES IN HORIZONTAL POSITION.

- NOTES:
1. COORDINATE BORDER TYPE AND FINISH WITH ARCHITECT PRIOR TO ORDERING.

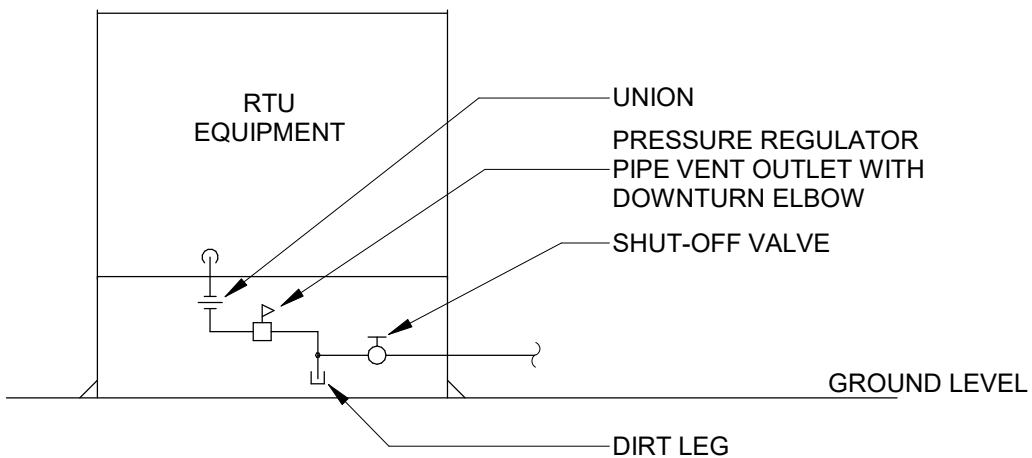


1 GAS PIPING CONNECTION FOR EQUIPMENT DETAIL

NO SCALE

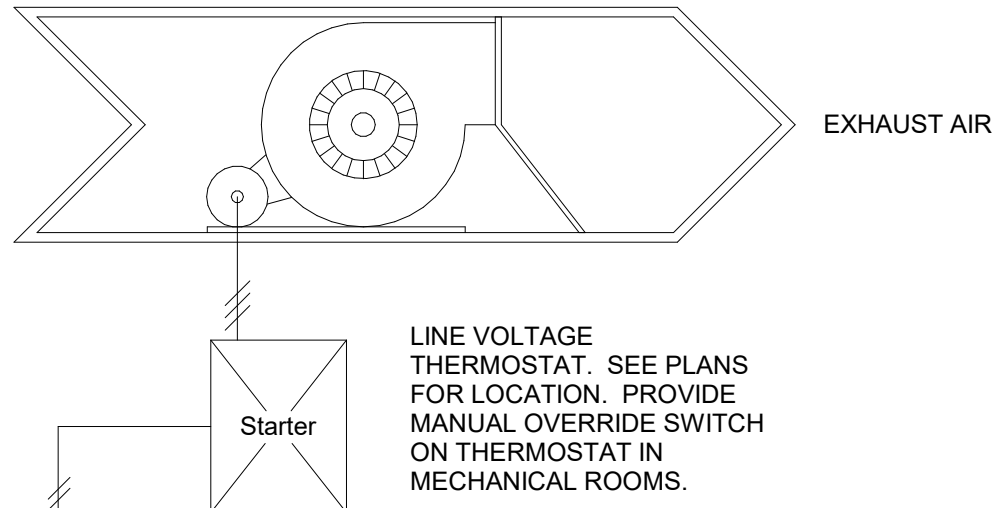

2 T - STAT CONTROLLED EXHAUST FAN

1/8" = 1'-0"

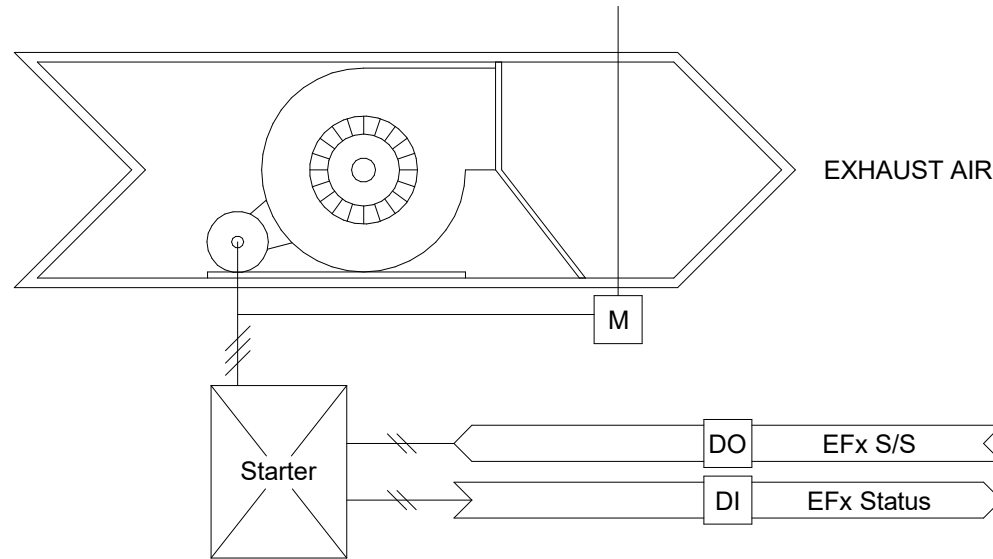


3 TOLIET/ GENERAL EXHAUST

1/8" = 1'-0"


ROOF TOP UNIT CONTROL		
I/O CONTROL POINTS	INPUT	OUTPUT
SPACE AIR TEMPERATURE	X	-
SUPPLY FAN STATUS	X	-
SUPPLY FAN START	-	X
SUPPLY AIR TEMPERATURE	X	-
OUTSIDE AIR DAMPER CONTROL	-	X
OUTSIDE AIR DAMPER STATUS	X	-
FILTER DIFF PRESSURE	X	-
GAS VALVE CONTROL	-	X
GAS VALVE STATUS	X	-
CONDENSING UNIT STATUS	X	-
CONDENSING UNIT START	-	X
EXHAUST FAN STATUS	X	-
EXHAUST FAN START	-	X
EXHAUST AIR DAMPER CONTROL	-	X
EXHAUST AIR DAMPER STATUS	X	-
SUPPLY DUCT SMOKE DETECTION	X	-

4 RTU/ WITH GAS FIRED HEAT INTEGRAL CONDENSING UNIT CONTROL DIAGRAM

1/8" = 1'-0"

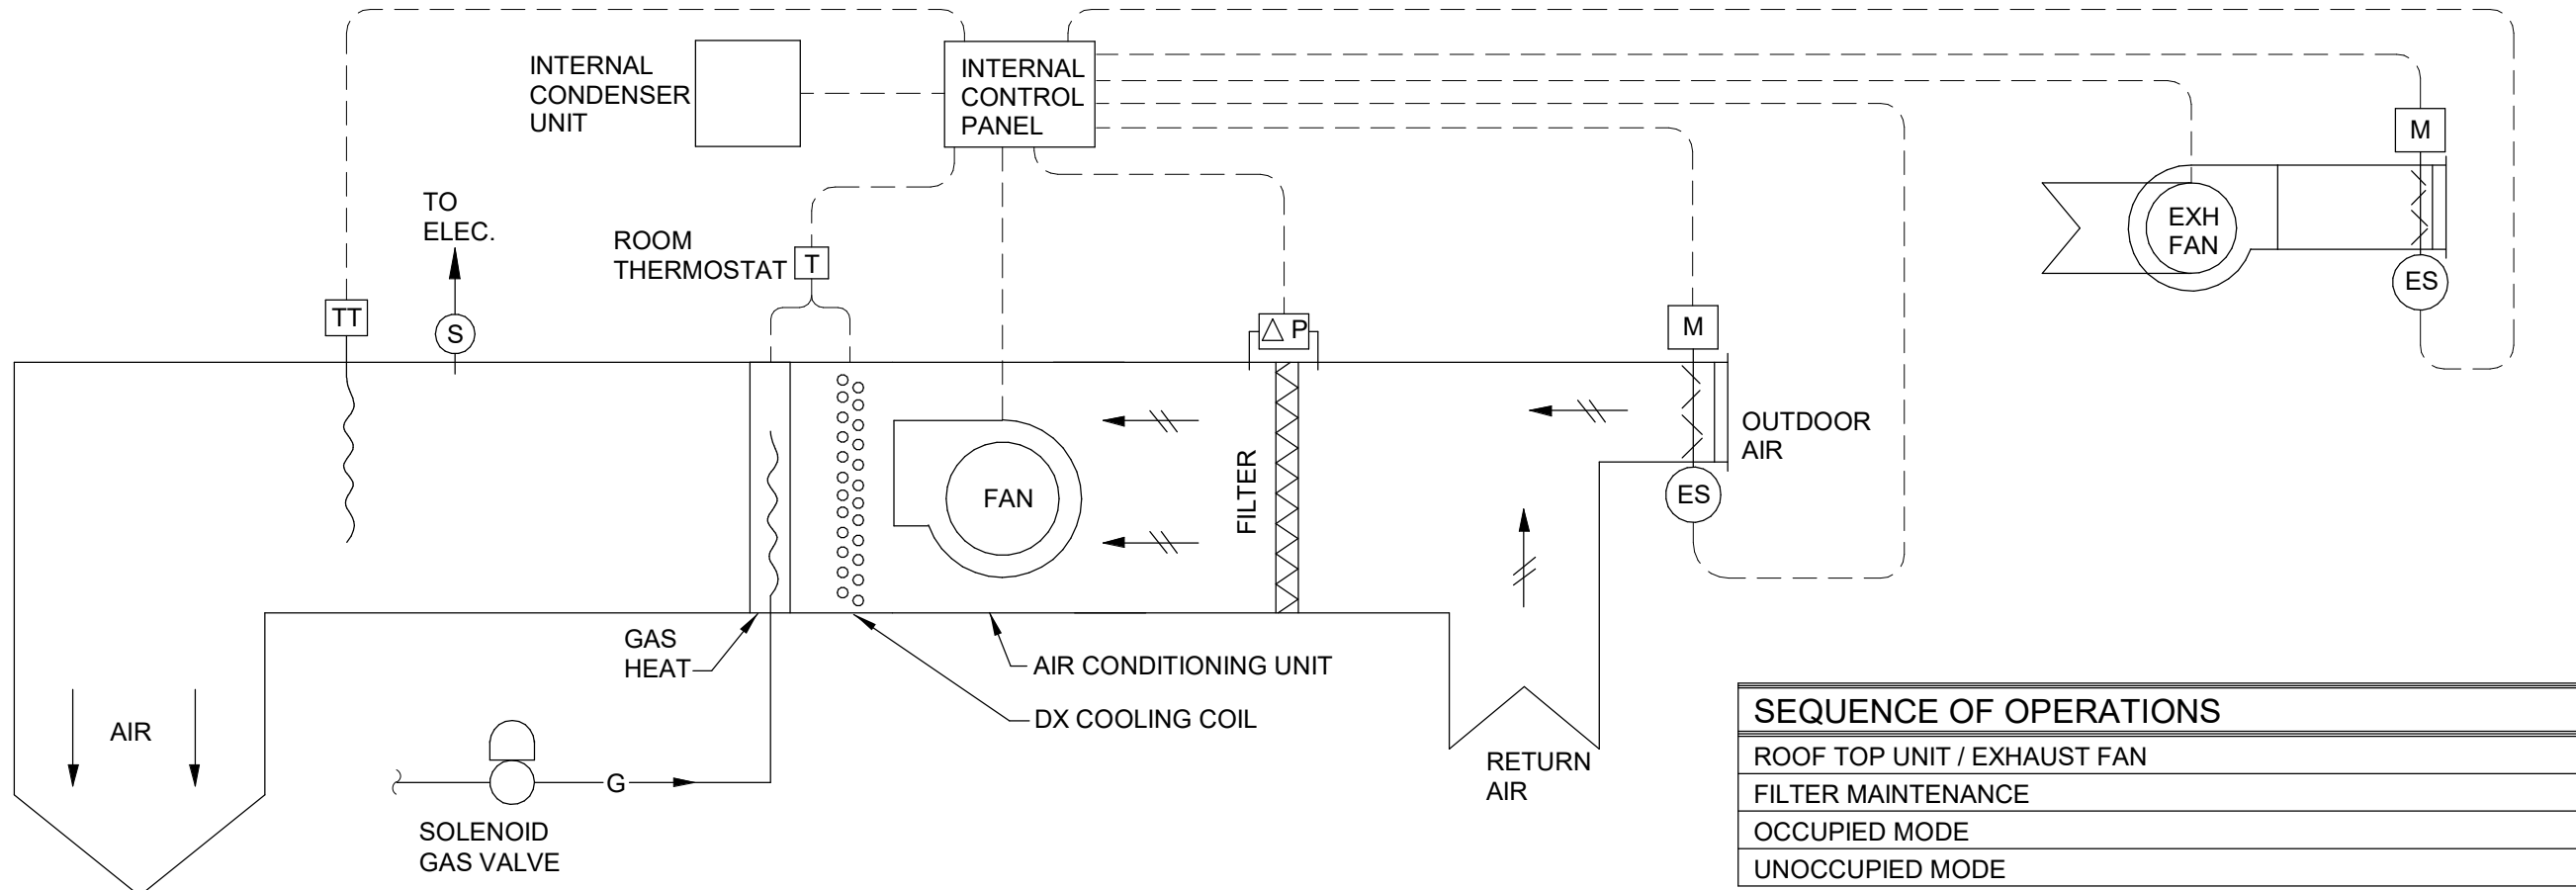


SEQUENCE OF OPERATIONS	
ROOF TOP UNIT / EXHAUST FAN	
FILTER MAINTENANCE	
OCCUPIED MODE	
UNOCCUPIED MODE	

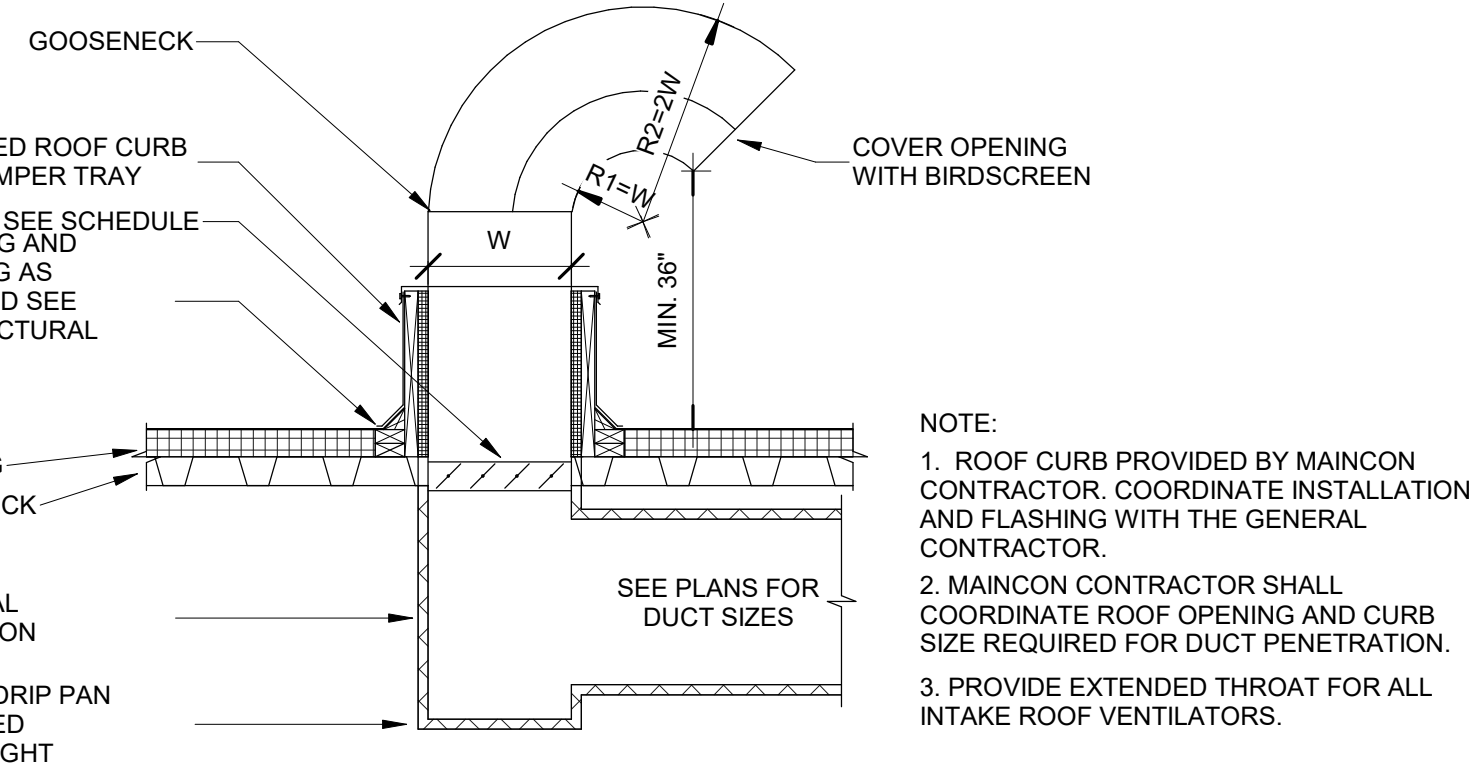

5 GOOSENECK DETAIL - EXHAUST


NO SCALE

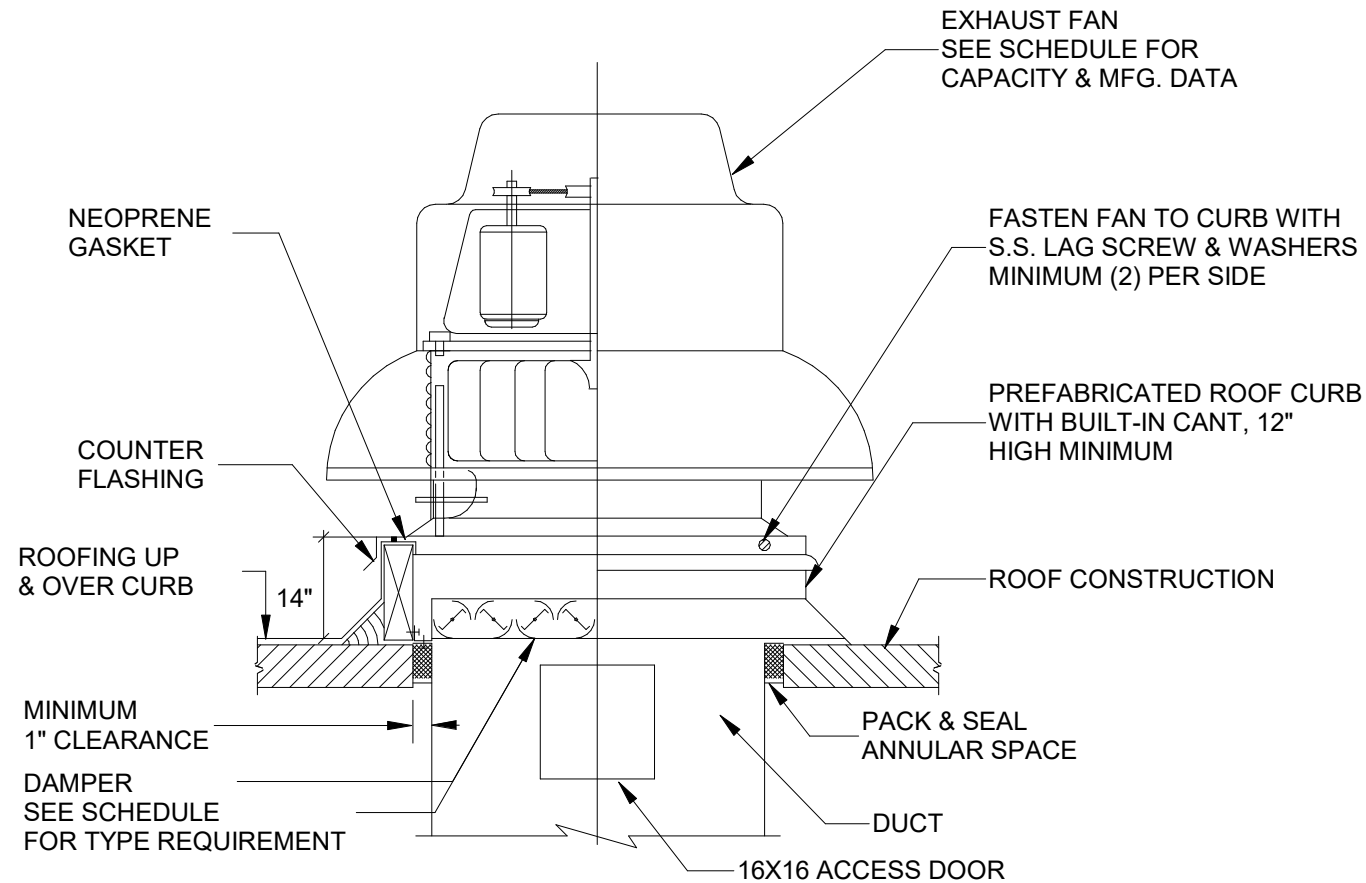

- NOTES:
1. FOR CONSTRUCTION WITH INSULATION ABOVE ROOF SLAB, DECK, ETC. SUPPORT CURB DIRECTLY ON ROOF STRUCTURE. COORDINATION INSTALLATION OF ROOF CURB WITH LANDLORD'S
 2. MAINCON CONTRACTOR TO MAINTAIN WARRANTY.

6 DOWNBLAST EXHAUST FAN DETAIL

1/8" = 1'-0"

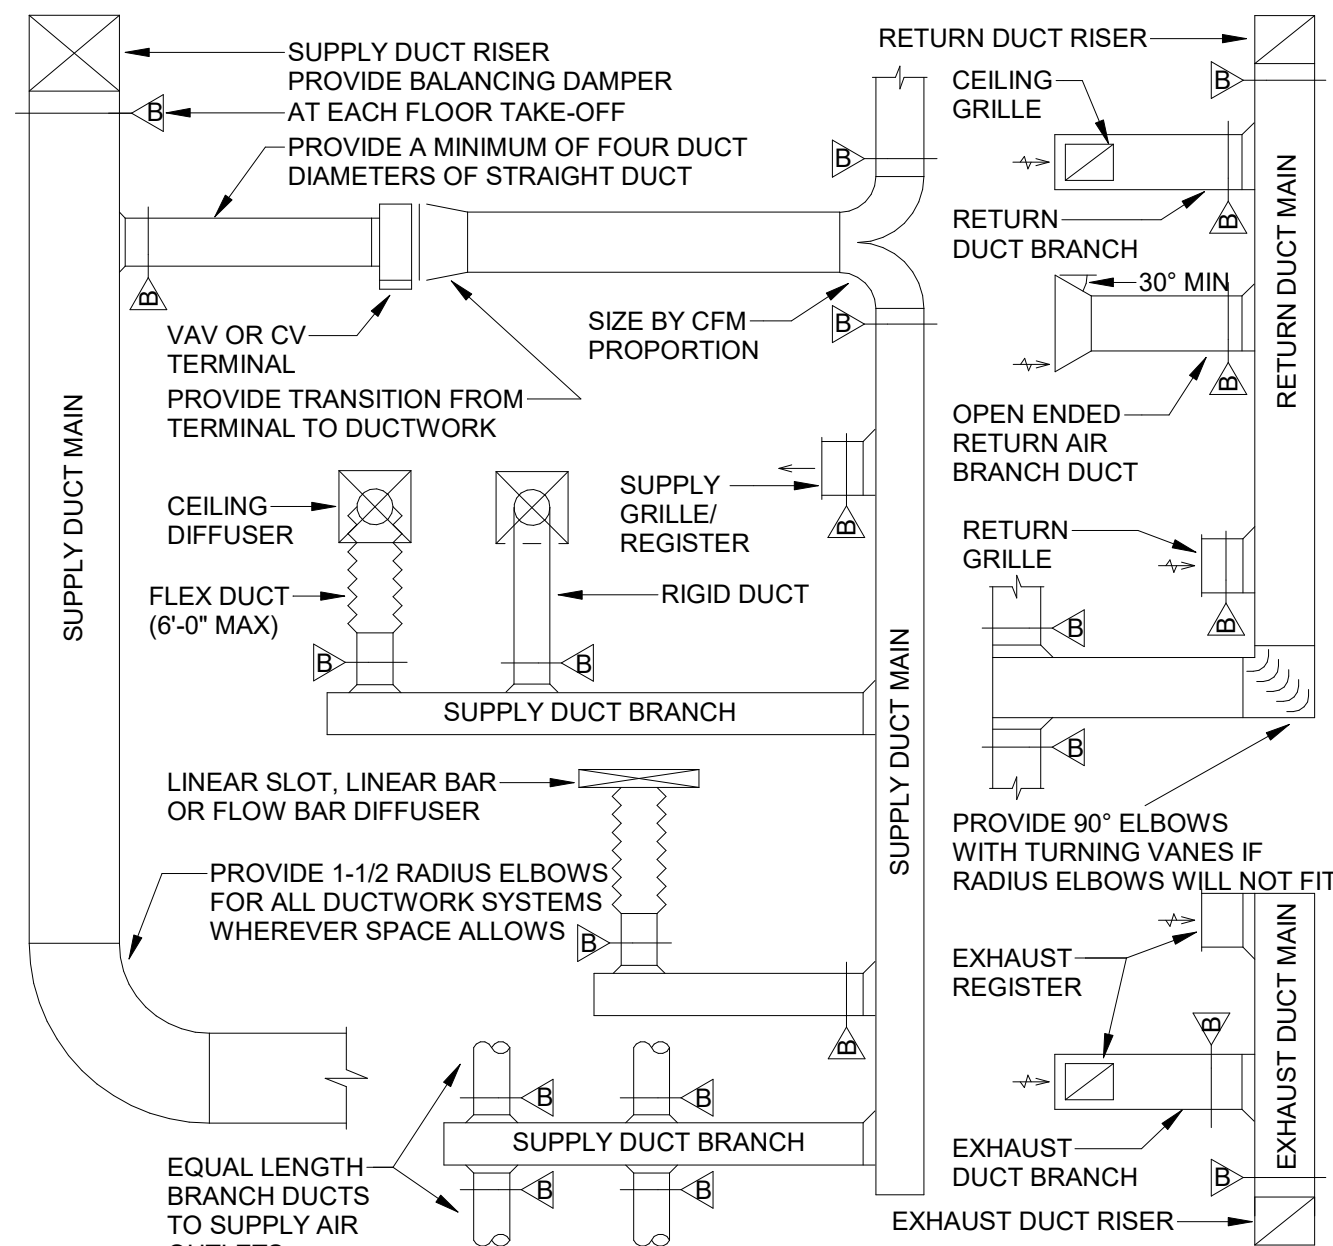

- NOTES:
1. REFER TO HVAC FLOOR PLANS FOR DUCT SIZES
 2. REFER TO SCHEDULES FOR GRILLES, REGISTERS, DIFFUSERS AND TERMINAL SIZES AND TYPES
 3. PROVIDE A MANUAL TYPE BALANCING DAMPER FOR EACH SUPPLY OUTLET AND RETURN INLET
 4. ALL DUCT RUNOUTS TO DIFFUSERS SHALL BE THE SAME SIZE AS DIFFUSER NECK SIZE, UNLESS OTHERWISE NOTED
 5. FLEX DUCT WILL NOT BE ALLOWED ON RETURN OR EXHAUST DUCTWORK SYSTEMS
 6. PROVIDE 12" AIR CUSHION AT THE END OF EACH SUPPLY MAIN AND BRANCH DUCT
 7. INDIVIDUAL BRANCH BALANCING DAMPERS NOT REQUIRED FOR SUPPLY OR EXHAUST REGISTERS

7 DUCTWORK INSTALLATION DIAGRAM

NO SCALE



Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



SENSITIVE SECURITY INFORMATION

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN 49 CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED. CTA ASSUMES NO RISK OF LIABILITY FOR ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY SCALING OF THIS DRAWING.

RED LINE EXTENSION COMMUNITY OFFICE BUILDOUT

401 W 111TH STREET, CHICAGO, IL 60628

IN CHARGE	JC
APPROVED BY	RH
CHECKED BY	MM
DESIGNED BY	RH
DRAWN BY	NG
PROJECT NO.	2019-0017.06.
FILE NAME	23-0601_CTA RLE Community Office_23.rvt

MARK	DATE	DESCRIPTION
	2024-07-25	MAINCON - ISSUE FOR BID

MECHANICAL SCHEDULES AND DETAILS

M-6001

7/30/2024 4:39:42 PM

ABBREVIATIONS	
CL	CENTER LINE
A	AMPERES
AFB	ABOVE FINISHED FLOOR
AIC	AMPERES INTERRUPTING CAPACITY
AS/AF	AMPERE RATING OF SWITCH/FUSE
AFAT	AMPERE RATING OF CIRCUIT, BREAKER FRAME/TRIP
AV	AUDIO/VISUAL
AWG	AMERICAN WIRE GAUGE
C	CONDUIT, GENERIC TERM FOR RACEWAY
CB	CIRCUIT BREAKER
CKT	CIRCUIT
CF	CEILING FAN
CS	CRITICAL SYSTEM
DPDT	DOUBLE POLE DOUBLE THROW
DPST	DOUBLE POLE SINGLE THROW
DWG	DRAWING
EC	ELECTRICAL CONTRACTOR
ELEV	ELEVATOR
EMT	ELECTRICAL METALLIC TUBING
EOL	END OF LINE RESISTOR
ES	EQUIPMENT SYSTEM
EUH	ELECTRIC UNIT HEATER
FA	FIRE ALARM
FCC	FIRE CONTROL CENTER
FLA	FULL LOAD AMPS
FDR	FEEDER
GFCI	GROUND FAULT CIRCUIT INTERRUPTER
GFI	GROUND FAULT INTERRUPTER
GND/GRD	GROUND
GRC	GALVANIZED RIGID CONDUIT
HD	HAND DRYER
KVA	KILOVOLT-AMPERE
KW	KILOWATT
IG	ISOLATED GROUND
LS	LIFE SAFETY SYSTEM
LSGI	LONG TIME SHORT TIME GROUND INSTANT.
LV	LOW VOLTAGE
MCA	MINIMUM CIRCUIT AMPACITY
MCP	MOTOR CIRCUIT PROTECTOR
MI	MINERAL INSULATED CABLE
MOCB	MAXIMUM OVERCURRENT PROTECTIVE DEVICE
MC	METAL CLAD
NA	NOT APPLICABLE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
NTS	NOT TO SCALE
OCB	OVERCURRENT PROTECTIVE DEVICE
PC	PHOTOCONTROL
PH	PHASE
PNL	PANEL
PVC	POLYVINYL CHLORIDE CONDUIT
RLM	RANGE LIMIT MARKER
RSC	RIGID STEEL CONDUIT
SP	STANDBY POWER SYSTEM
SPDT	SINGLE POLE DOUBLE THROW
SPST	SINGLE POLE SINGLE THROW
SPD	SURGE PROTECTION DEVICE
SS	STAINLESS STEEL
TEL	TELECOM
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE
UPS	UNINTERRUPTIBLE POWER SUPPLY
V	VOLTAGE
WHE	ELECTRIC WATER HEATER
WP	WEATHERPROOF
XP	EXPLOSION PROOF
XFMR	TRANSFORMER

	ATS, CPC, DPH, DPL, DSH, DSL, MCC OR MS: SIZE APPROXIMATELY AS SHOWN. DOUBLE LINE INDICATES FRONT.
	SURFACE MOUNTED PANELBOARD WITH NORMAL/GENERATOR BACKUP FEEDER
	RECESSED PANELBOARD WITH NORMAL/GENERATOR BACKUP FEEDER
	SURFACE MOUNTED PANELBOARD
	RECESSED PANELBOARD
	TELEPHONE BACKBOARD: LENGTH APPROXIMATELY AS SHOWN
	BUSWAY RISER WITH PLUG IN UNIT, FUSE
	BUSWAY RISER WITH PLUG IN UNIT, BREAKER
	BUSWAY HORIZONTAL
	CABLE TAP BOX
	TRANSFORMER
	GENERATOR
	AUTOMATIC TRANSFER SWITCH
	HEAVY DUTY DISCONNECT SWITCH
	HEAVY DUTY DISCONNECT SWITCH WITH FUSE
	MOTOR STARTER
	EMERGENCY POWER OFF BUTTON
	VARIABLE FREQUENCY DRIVE
	EQUIPMENT CONTROL PANEL
\$MD	MOTORIZED DOOR CONTROLLER (FURNISHED WITH DOOR)
\$MS	MOTORIZED SHADE CONTROLLER (FURNISHED WITH SHADES)
\$PS	PROJECTION SCREEN CONTROLLER (FURNISHED WITH SCREEN)
\$SC	SPEED CONTROLLER (FURNISHED WITH EQUIPMENT)
\$T	THERMAL OVERLOAD/DISCONNECT SWITCH
	FLEXIBLE CONNECTION
	JUNCTION BOX
	GROUND BAR

---	DASHED DENOTES EXISTING EQUIPMENT TO REMAIN UNLESS OTHERWISE INDICATED.
(X)	EXISTING ITEM TO BE REMOVED AND CIRCUIT PULLED BACK TO NEXT ACTIVE OUTLET OR BACK TO PANEL.
(E)	EXISTING ITEM TO REMAIN.
(XN)	EXISTING ITEM TO BE REMOVED AND NEW ITEM AS SPECIFIED INSTALLED ON EXISTING OUTLET, RECONNECT TO EXISTING CIRCUIT
(XE)	EXISTING ITEM TO BE REMOVED, OUTLET BLANKED AND CIRCUIT EXTENDED TO NEW ITEM AS SHOWN.
(XR)	EXISTING ITEM TO BE REMOVED AND RELOCATED.
(XL)	NEW LOCATION OF EXISTING RELOCATED ITEM.
(XM)	EXIST ITEM TO BE REMOVED, WIRING PROTECTED AND ITEM REINSTALLED IN EXISTING LOCATION.

	C	=	COUNTER HEIGHT
	IG	=	ISOLATED GROUND
	a	=	LOWER CASE LETTER INDICATES SWITCH CONTROL FOR TOP OUTLET
	6	=	NUMBER INDICATES CIRCUIT NUMBER
	B	=	PEDESTAL MOUNTED ON BENCH
	a	=	LOWER CASE INDICATES SWITCH CONTROL
	2	=	DOUBLE POLE SWITCH
	3	=	THREE WAY SWITCH
	4	=	FOUR WAY SWITCH
	F	=	FAN SWITCH
	H	=	ILLUMINATED HANDLE SWITCH
	K	=	KEY SWITCH
	MC	=	MOMENTARY CONTACT SWITCH
	P	=	PILOT LIGHT SWITCH

	GROUND BAR - 2"W x 1/4" THICK COPPER BUS, UNLESS OTHERWISE INDICATED.
	METER SOCKET AND METER
	MECHANICAL EQUIPMENT TAG NUMBER REFER TO MECHANICAL EQUIPMENT SCHEDULE.
	FEEDER TAG, REFER TO CIRCUIT SCHEDULE FOR FEEDER SIZE
	DRAWING KEY NOTE
	DETAIL IDENTIFIER, INDICATING DETAIL NO. 2 ON DRAWING E-4.

	FLOOR BOX, DOUBLE DUPLEX RECEPTACLE OUTLET: 125V SEE KEYNOTES FOR ADDITIONAL INFORMATION.
	FIRE RATED POKE THROUGH, SEE KEYNOTES FOR ADDITIONAL INFORMATION

A THIS SHEET IS A GENERAL LIST OF SYMBOLS AND ABBREVIATIONS AND SHALL BE USED AS A DICTIONARY TO DEFINE ITEMS INDICATED ON DRAWINGS. NOT ALL SYMBOLS OR ABBREVIATIONS ARE NECESSARILY USED ON THIS PROJECT.

R2/1A-1,3,5 —	ARROW SIGNIFIES HOMERUNS TO PANEL CIRCUIT NOTED. PROVIDE #12 FOR EACH CIRCUIT PLUS A #12 GROUND WIRE. (IE: 3/4"C, #6/12 & 1#12 GND.)
R2/1A-1,3,5 (30A-3P-NG)	ARROW SIGNIFIES BREAKER SIZE AND HOMERUN TO PANEL NOTED. REFER TO WIRING SCHEDULE. (IE: 3/4" #4#10 & 1#10 GND)

	SINGLE RECEPTACLE OUTLET: 125V; WALL MOUNTED
	DUPLEX RECEPTACLE OUTLET: 125V; WALL MOUNTED
	DUPLEX RECEPTACLE OUTLET: 125V, GROUND FAULT INTERRUPTER, WALL MOUNTED
	DOUBLE DUPLEX RECEPTACLE OUTLET: 125V; WALL MOUNTED
	WALL MOUNTED POWER CONNECTION TO ELECTRIFIED FURNITURE SYSTEM. CONTRACTOR TO PROVIDE CABLE FLEX CONDUIT AND CONNECTION TO FURNITURE EQUIPMENT AND CONNECT.
	SINGLE RECEPTACLE OUTLET: 125V; CEILING MOUNTED
	DUPLEX RECEPTACLE OUTLET: 125V; CEILING MOUNTED
	DOUBLE DUPLEX RECEPTACLE OUTLET: 125V; CEILING MOUNTED
	POWER TYPE MULTI-OUTLET ASSEMBLY, LENGTH APPROXIMATELY AS SHOWN. ONE OUTLET PER FT. UNLESS NOTED OTHERWISE.
	POWER/TELECOM TYPE MULTI-OUTLET ASSEMBLY. ONE OUTLET PER FT. UNLESS NOTED OTHERWISE. LENGTH APPROXIMATELY AS SHOWN
	TELECOM OUTLET W INDICATES WALL PHONE, C INDICATES COUNTER HEIGHT
	TELECOM CONNECTION TO ELECTRIFIED FURNITURE SYSTEM
	TELEVISION OUTLET
	SINGLE POLE SWITCH
	WALL DIMMER
	PHOTOCELL
	OCCUPANCY SENSOR; WALL MOUNTED, DUAL TECHNOLOGY WITH OVERRIDE SWITCH.
	VACANCY SENSOR; CEILING MOUNTED.
	OCCUPANCY SENSOR; CEILING MOUNTED DUAL TECHNOLOGY.
	WALL MOUNTED JUNCTION BOX FOR AUDIO/VISUAL.
	WALL MOUNTED JUNCTION BOX FOR HDMI.
	WALL MOUNTED JUNCTION BOX FOR 120V HANDRYER POWER.



CHICAGO TRANSIT
AUTHORITY

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

**CTA RED LINE EXTENSION
COMMUNITY OFFICE**

401 W 111TH STREET, CHICAGO, IL 60628

[illegible]

E-1001

GENERAL NOTES CONT.:

25. MINIMUM BRANCH CIRCUIT WIRING SHALL BE AS FOLLOWS WITH ASSOCIATED BRANCH CIRCUIT PROTECTION (INCREASE WIRE SIZE TO COMPLY WITH VOLTAGE DROP REQUIREMENTS):
 - A. 15A TO 20A - #12 AWG CU + 1 #12 AWG CU GRD
 - B. 25A TO 30A - #10 AWG CU + 1 #10 AWG CU GRD
 - C. 35A TO 50A - #8 AWG CU + 1 #10 AWG CU GRD
 - D. 60A - #6 AWG CU + 1 #10 AWG CU GRD
 - E. 100A - #3 AWG CU + 1 #8 AWG CU GRD
 - F. 150A - #1/0 AWG CU + 1 #6 AWG CU GRD
26. ALL EMPTY CONDUITS (SPARES) SHALL BE PROVIDED WITH PULL CORD WITH 4'-0" PIGTAIL AT BOTH ENDS.
27. PROVIDE MAXIMUM OF 3' FLEXIBLE CONDUIT FROM JUNCTION BOXES TO EQUIPMENT.



Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

401 W 111TH STREET, CHICAGO, IL 60628

[illegible]

E-1002



8' 4' 2' 0

SCALE: 1/4" = 1'-0"

1. REFER TO DRAWING E-1001 FOR ELECTRICAL LEGEND AND ABBREVIATIONS AND DRAWING E-1002 ELECTRICAL GENERAL NOTES.
2. NEW 200A, 120/208V, 3PH. 4W ELECTRICAL PANELBOARD. REFER TO ELECTRICAL SINGLE LINE DIAGRAM ON THIS DRAWING.
3. COMED TO INSTALL NEW ELECTRIC SERVICE UTILITY POLE AND NEW EQUIPMENT SERVICE. COMED SHALL BE RESPONSIBLE FOR ALL WORK TO BRING SERVICE TO SERVICE DROP LOCATION AND ALL PERMITS. ALL WORK SHALL BE COORDINATED WITH COMED.
4. COMED SHALL BE RESPONSIBLE FOR ALL WORK TO BRING SERVICE TO SERVICE DROP LOCATION, ALL PERMITS AND PATCHING OF PAVEMENT. ALL WORK SHALL BE COORDINATED WITH COMED.
5. ALL WORK SHALL BE DONE IN ACCORDANCE WITH COMED, CDOT, AND CTA SPECIFICATION REQUIREMENTS.
6. MAIN CONTRACTOR "MAINCON" IS RESPONSIBLE FOR COORDINATION WITH COMED.



Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.



WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.


DRAWING SCALE IS NOT GUARANTEED.
CTA ASSUMES NO RISK OF LIABILITY FOR
ERRORS CAUSE, DIRECTLY OR INDIRECTLY, BY
SCALING OF THIS DRAWING.

401 W 111TH STREET, CHICAGO, IL 60628


IN CHARGE	JC
APPROVED BY	OS
CHECKED BY	JM
DESIGNED BY	EM
DRAWN BY	EM
PROJECT NO.	23-0601
FILE NAME	23-0601_CTA RLE Community Office 23.rvt

[illegible]

E-1100

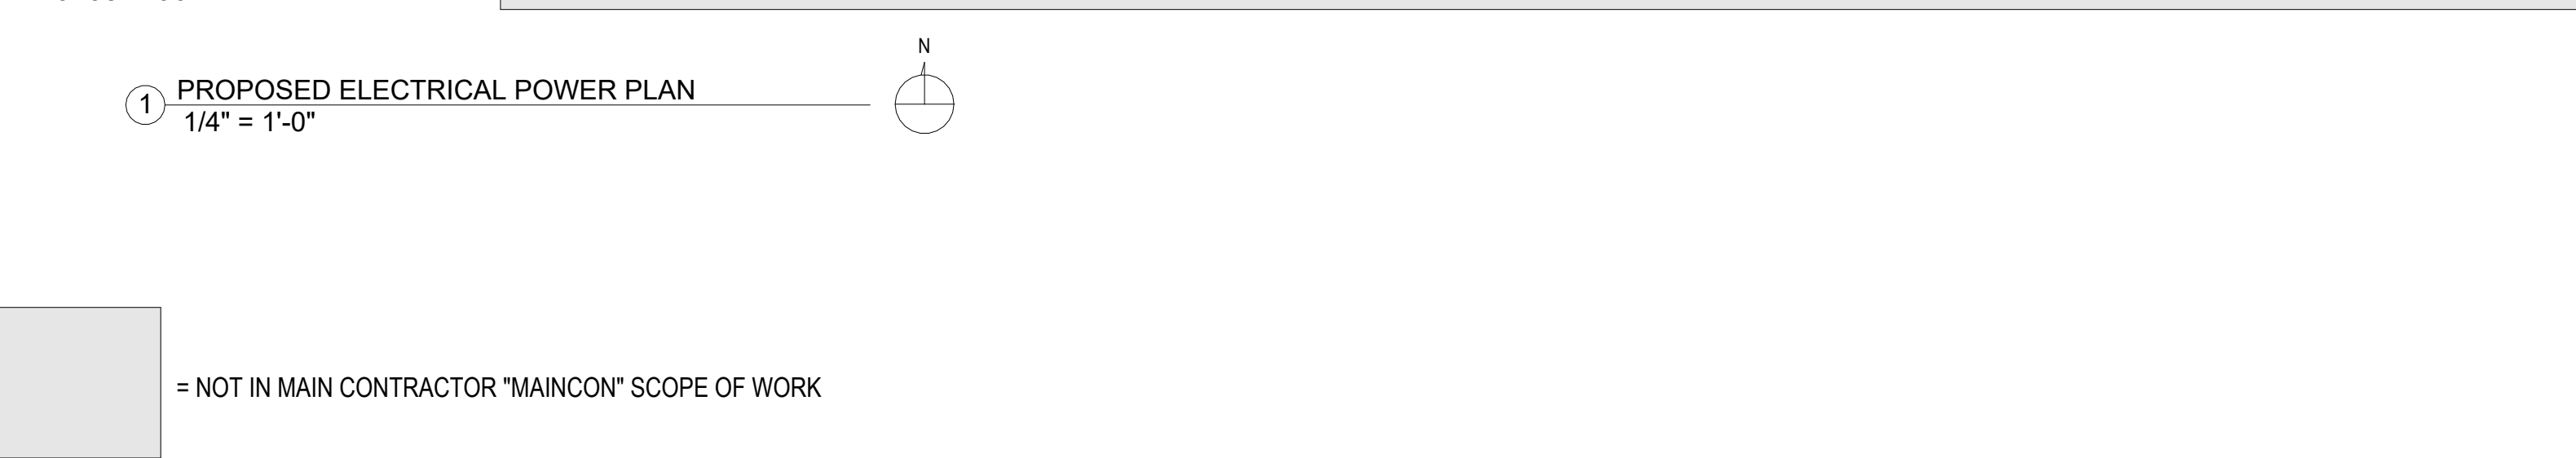

Muller & Muller, Ltd. expressly reserves its common law copyright and other property rights in these plans. These plans are not to be reproduced, changed or copied in any form or manner whatsoever, nor are they to be assigned to any third party, without first obtaining the expressed written consent of Muller & Muller, Ltd.

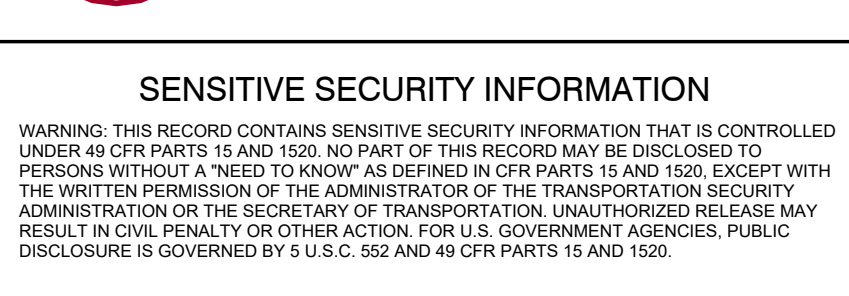

CTA RED LINE EXTENSION
COMMUNITY OFFICE
401 W 111TH STREET, CHICAGO, IL 60628

PROPOSED ELECTRICAL
POWER PLAN

E-1101



1. MAIN CONTRACTOR "MAINCON" SHALL REFER TO DRAWING E-1001 FOR ELECTRICAL LEGEND AND ABBREVIATIONS AND DRAWING E-1002 ELECTRICAL GENERAL NOTES.
2. MAINCON SHALL REFER TO PANEL SCHEDULE ON DRAWING E-6003.
3. MAINCON SHALL PROVIDE LOCAL FUSED SAFETY DISCONNECT SWITCH RATED FOR LOAD NEAR EACH ROOF TOP MECHANICAL EQUIPMENT. FURNISH AND INSTALL EQUIPMENT DISCONNECT SWITCHES IN STRICT COMPLIANCE WITH CHICAGO ELECTRICAL CODE REQUIREMENTS. INCLUDE NAMEPLATE ON EACH DISCONNECT SWITCH WHICH STATES ID, VOLTAGE, PHASE, AMPERES AND NEMA TYPE.
4. MAINCON SHALL PROVIDE A CONVENIENCE RECEPTACLE FOR MAINTENANCE PURPOSES ON ACCU UNIT AND ON EACH ROOF TOP FAN. RECEPTACLES SHALL BE GFCI TYPE MOUNTED IN WEATHERPROOF BOXES. EACH RECEPTACLE SHALL BE ON CIRCUIT, AS SHOWN.
5. ALL CONDUIT ROUTINGS TO ROOF MOUNTED EQUIPMENT SHALL BE ROUTED BELOW ROOF AND PENETRATE ROOF THRU AN EQUIPMENT CURB ADJACENT TO EQUIPMENT (WITHIN 1' OF EQUIPMENT) OR THRU THE EQUIPMENT CURB. THIS SHALL BE PROVIDED AT EACH ROOF MOUNTED EQUIPMENT LOCATION BY MAINCON.
6. MAINCON SHALL PROVIDE GALVANIZED UNISTRUT SUPPORT FOR RECEPTACLE AND EQUIPMENT LOCAT DISCONNECT SWITCH.



CHICAGO TRANSIT
AUTHORITY

WARNING: THIS RECORD CONTAINS SENSITIVE SECURITY INFORMATION THAT IS CONTROLLED UNDER 49 CFR PARTS 15 AND 1520. NO PART OF THIS RECORD MAY BE DISCLOSED TO PERSONS WITHOUT A "NEED TO KNOW" AS DEFINED IN CFR PARTS 15 AND 1520, EXCEPT WITH THE WRITTEN PERMISSION OF THE ADMINISTRATOR OF THE TRANSPORTATION SECURITY ADMINISTRATION OR THE SECRETARY OF TRANSPORTATION. UNAUTHORIZED RELEASE MAY RESULT IN CIVIL PENALTY OR OTHER ACTION. FOR U.S. GOVERNMENT AGENCIES, PUBLIC DISCLOSURE IS GOVERNED BY 5 U.S.C. 552 AND 49 CFR PARTS 15 AND 1520.

CTA RED LINE EXTENSION
COMMUNITY OFFICE

401 W 111TH STREET, CHICAGO, IL 60628

PROPOSED ROOFTOP POWER PLAN

E-1102

= NOT IN MAIN CONTRACTOR "MAINCON" SCOPE OF WORK

ELECTRICAL EQUIPMENT SCHEDULE											
TAG	VOLTAGE	PHASE WIRE	NEUTRAL WIRE	GROUND WIRE	TOTAL WIRE	HP	AMPS	KW	PANEL	CIRCUIT	CABLE/CONDUIT
ACCU-1	208 V	2	0	1	3	-	42 A	8.32	N-PP	15,17	2#6AWG + 1#10AWG G. IN 3/4" GRS C.
ACCU-2	208 V	2	0	1	3	-	42 A	8.32	N-PP	19,21	2#6AWG + 1#10AWG G. IN 3/4" GRS C.
CUH-1	208 V	2	0	1	3		14 A	3	N-PP	23,25	2#12AWG + 1#12AWG G. IN 3/4" GRS C.
CUH-2	208 V	2	0	1	3		14 A	3	N-PP	29,31	2#12AWG + 1#12AWG G. IN 3/4" GRS C.
CUH-3	208 V	2	0	1	3		14 A	3	N-PP	22,24	2#12AWG + 1#12AWG G. IN 3/4" GRS C.
EF-1	120 V	1	1	1	3	.07	1 A		N-PP	26	2#12AWG + 1#12AWG G. IN 3/4" GRS C.
EF-2	120 V	1	1	1	3	.07	1 A		N-PP	28	2#12AWG + 1#12AWG G. IN 3/4" GRS C.
EF-3	120 V	1	1	1	3	.17	4 A		N-PP	30	2#12AWG + 1#12AWG G. IN 3/4" GRS C.
EUH-1	208 V	2	0	1	3		14 A	3	N-PP	18,20	2#12AWG + 1#12AWG G. IN 3/4" GRS C.

[illegible]