

BLACKTECH SOLUTIONS

CORP

Licensed Electrical Contractor — Chicago, IL

OPTION A — PREMIUM

ESTIMATE NUMBER

BSC-E-2026-PR001-


A

DATE

June 14, 2026

PROJECT	SITE ADDRESS	CLIENT
Two-Flat Electrical Rehab	4823 S Prairie Ave	Alain David Carranza
4823 S Prairie Ave	Chicago, IL 60615	(773) 414-1473

 Current Electrical Progress — As of June 14, 2026

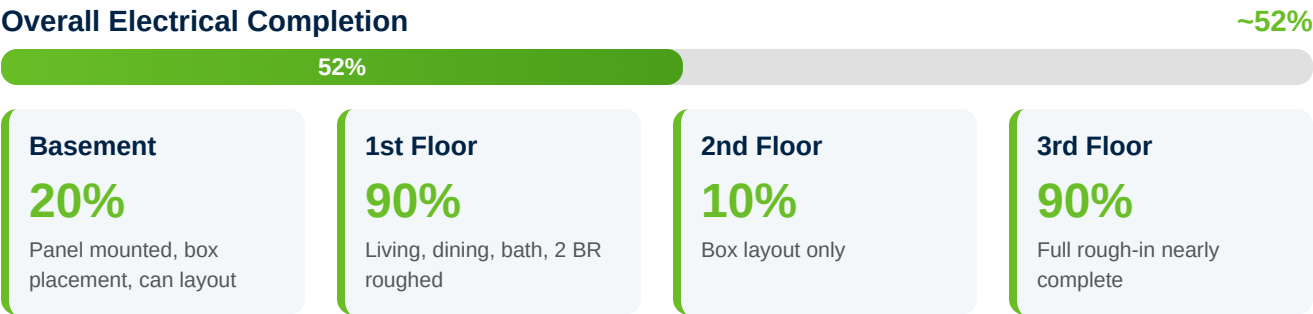

 Scope of Work — Option A (Premium)

DESCRIPTION	LABOR HRS	MATERIALS	TOTAL
1. SERVICE ENTRANCE & PANEL DISTRIBUTION			
200A Main Service Panel — Square D QO (includes meter base, mast, weatherhead)	24	\$2,850	\$6,450
(2) 100A Sub-Panels — One per unit (Square D QO 20-space)	16	\$1,200	\$3,600
Service entrance conductors (2/0 AWG copper, EMT conduit)	12	\$890	\$2,690
Subtotal — Service & Distribution	52	\$4,940	\$12,740
2. BASEMENT ELECTRICAL			
General lighting (6× LED ceiling mounts), receptacles, switches	18	\$420	\$3,120
GRAND TOTAL — OPTION A (PREMIUM)	336 HRS	\$14,950	\$65,350

DESCRIPTION	LABOR HRS	MATERIALS	TOTAL
Laundry circuit (20A dedicated), utility sink GFCI	6	\$180	\$1,080
Smoke/CO detectors (hardwired, interconnected — 4 units)	8	\$320	\$1,520
Subtotal — Basement	32	\$920	\$5,720
3. FIRST FLOOR UNIT (2BR/1BA)			
Living Room — Recessed LED cans (6×), dimmer switches, 8× receptacles	20	\$680	\$3,680
Dining Room — Recessed LED (4×), ceiling fan box, 6× receptacles	14	\$420	\$2,520
Kitchen — (4) small appliance circuits, range circuit, dishwasher, disposal, under-cabinet LED, 6× recessed	32	\$1,450	\$6,250
Bathroom — GFCI vanity circuit, exhaust fan, heated floor circuit, vanity lighting	18	\$580	\$3,280
Bedrooms (2) — Ceiling boxes with fans, 3-way switches, 10× receptacles	22	\$520	\$3,820
Subtotal — 1st Floor Unit	106	\$3,650	\$19,550
4. SECOND FLOOR UNIT (2BR/1BA) — IDENTICAL SCOPE			
Complete electrical rough-in + trim (same as 1st floor unit)	106	\$3,650	\$19,550
Subtotal — 2nd Floor Unit	106	\$3,650	\$19,550
5. COMMON AREAS & EXTERIOR			
Front porch (2 units) — Weatherproof receptacles, ceiling boxes, wall sconces	12	\$380	\$2,180
Rear yard — (2) weatherproof receptacles, security light circuits	8	\$220	\$1,420
Stairwell lighting (3 floors) — LED wall packs, 3-way switching	14	\$340	\$2,440
Subtotal — Common & Exterior	34	\$940	\$6,040
6. PERMITS & INSPECTIONS			
City of Chicago Electrical Permit (Two-Flat Rehab)	—	\$850	\$850
Inspection coordination (rough-in + final)	6	\$—	\$900
GRAND TOTAL — OPTION A (PREMIUM)	336 HRS	\$14,950	\$65,350

DESCRIPTION	LABOR HRS	MATERIALS	TOTAL
Subtotal — Permits & Inspections	6	\$850	\$1,750
GRAND TOTAL — OPTION A (PREMIUM)	336 HRS	\$14,950	\$65,350

 Payment Schedule

25% — Upon signing (deposit to start)	\$16,337.50
25% — Rough-in 50% complete	\$16,337.50
25% — Rough-in inspection passed	\$16,337.50
25% — Final inspection passed	\$16,337.50

Terms & Conditions:

- Estimate valid for 30 days from date above
- All work performed per Chicago Electrical Code (EMT conduit throughout)
- 1-year warranty on labor and materials
- Does not include HVAC, plumbing, low-voltage, or drywall repair
- Utility company fees (ComEd) not included
- Work schedule subject to permit approval and inspection availability

BLACKTECH SOLUTIONS CORP | 14076 Lincoln Ave, Dolton, IL | payroll@blacktechsolutionscorp.com | EIN: 82-3394717
Licensed Electrical Contractor — City of Chicago