

 **SAVE \$11,326 vs Option A — Value Engineering with Standard Materials**

BLACKTECH SOLUTIONS
CORP

Licensed Electrical Contractor — Chicago, IL

OPTION B — VALUE

ESTIMATE NUMBER
BSC-E-2026-PR001-
B


DATE
June 14, 2026

PROJECT
Two-Flat Electrical Rehab
4823 S Prairie Ave

SITE ADDRESS
4823 S Prairie Ave
Chicago, IL 60615

CLIENT
Alain David Carranza
(773) 414-1473

 Current Electrical Progress — As of June 14, 2026

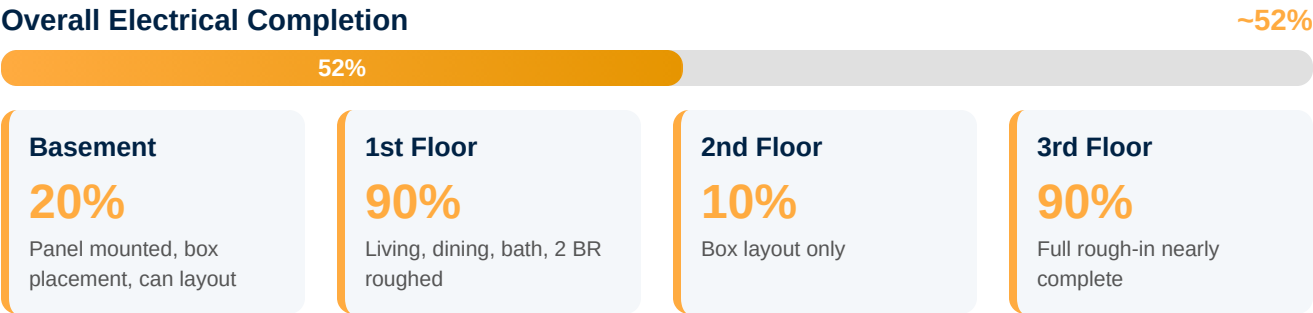

 Scope of Work — Option B (Value)

DESCRIPTION	LABOR HRS	MATERIALS	TOTAL
1. SERVICE ENTRANCE & PANEL DISTRIBUTION			
200A Main Service Panel — Eaton BR (includes meter base, mast, weatherhead)	24	\$1,950	\$5,550
(2) 100A Sub-Panels — One per unit (Eaton BR 20-space)	16	\$850	\$3,250
Service entrance conductors (2/0 AWG aluminum, EMT conduit)	12	\$520	\$2,320
Subtotal — Service & Distribution	52	\$3,320	\$11,120
2. BASEMENT ELECTRICAL			
GRAND TOTAL — OPTION B (VALUE)	278 HRS	\$10,390	\$54,020

DESCRIPTION	LABOR HRS	MATERIALS	TOTAL
General lighting (4× LED ceiling mounts), receptacles, switches	14	\$280	\$2,380
Laundry circuit (20A dedicated), utility sink GFCI	6	\$180	\$1,080
Smoke/CO detectors (hardwired, interconnected — 4 units)	8	\$240	\$1,440
Subtotal — Basement	28	\$700	\$4,900
3. FIRST FLOOR UNIT (2BR/1BA)			
Living Room — LED ceiling mounts (4×), standard switches, 6× receptacles	16	\$420	\$2,820
Dining Room — LED ceiling mount (2×), ceiling fan box, 4× receptacles	10	\$240	\$1,740
Kitchen — (3) small appliance circuits, range circuit, dishwasher/disposal combo circuit, LED ceiling mount	24	\$980	\$4,580
Bathroom — GFCI vanity circuit, exhaust fan, vanity lighting	14	\$380	\$2,480
Bedrooms (2) — Ceiling boxes, standard switches, 8× receptacles	18	\$380	\$3,080
Subtotal — 1st Floor Unit	82	\$2,400	\$14,700
4. SECOND FLOOR UNIT (2BR/1BA) — IDENTICAL SCOPE			
Complete electrical rough-in + trim (same as 1st floor unit)	82	\$2,400	\$14,700
Subtotal — 2nd Floor Unit	82	\$2,400	\$14,700
5. COMMON AREAS & EXTERIOR			
Front porch (2 units) — Weatherproof receptacles, ceiling boxes	10	\$280	\$1,780
Rear yard — (2) weatherproof receptacles, 1× security light circuit	6	\$160	\$1,060
Stairwell lighting (3 floors) — LED wall packs, 3-way switching	12	\$280	\$2,080
Subtotal — Common & Exterior	28	\$720	\$4,920
6. PERMITS & INSPECTIONS			
GRAND TOTAL — OPTION B (VALUE)	278 HRS	\$10,390	\$54,020

DESCRIPTION	LABOR HRS	MATERIALS	TOTAL
City of Chicago Electrical Permit (Two-Flat Rehab)	—	\$850	\$850
Inspection coordination (rough-in + final)	6	\$—	\$900
Subtotal — Permits & Inspections	6	\$850	\$1,750
GRAND TOTAL — OPTION B (VALUE)	278 HRS	\$10,390	\$54,020



What's Different in Option B

- **Panels:** Eaton BR (residential grade) vs Square D QO — saves \$1,400
- **Service conductors:** Aluminum vs Copper — saves \$370
- **Lighting:** Standard LED ceiling mounts vs recessed cans — saves \$1,200
- **Kitchen circuits:** 3 small appliance circuits vs 4 — saves \$450
- **Receptacles/Switches:** Standard grade vs decorator grade — saves \$680
- **Labor reduction:** 58 fewer hours (simpler installs) — saves \$8,700

Note: Both options meet Chicago Electrical Code. Option A uses premium materials and more fixtures for enhanced aesthetics and functionality.



Payment Schedule

25% — Upon signing (deposit to start)	\$13,505
25% — Rough-in 50% complete	\$13,505
25% — Rough-in inspection passed	\$13,505
25% — Final inspection passed	\$13,505

Terms & Conditions:

- Estimate valid for 30 days from date above
- All work performed per Chicago Electrical Code (EMT conduit throughout)
- 1-year warranty on labor and materials
- Does not include HVAC, plumbing, low-voltage, or drywall repair
- Utility company fees (ComEd) not included
- Work schedule subject to permit approval and inspection availability

BLACKTECH SOLUTIONS CORP | 14076 Lincoln Ave, Dolton, IL | payroll@blacktechsolutionscorp.com | EIN: 82-3394717
Licensed Electrical Contractor — City of Chicago