

BLACKTECH SOLUTIONS
CORP

Licensed Electrical Contractor — Chicago, IL

ESTIMATE NUMBER
BSC-E-2026-
PR001


DATE
June 11, 2026

PROJECT
Renovation of Existing Two-Flat
Residential Structure — Full
Electrical

SITE ADDRESS
4823 S Prairie Avenue
Chicago, IL 60615

SCOPE
3-Floor + Basement
Complete Electrical Rough-In &
Finish

 Current Electrical Progress — As of June 11, 2026

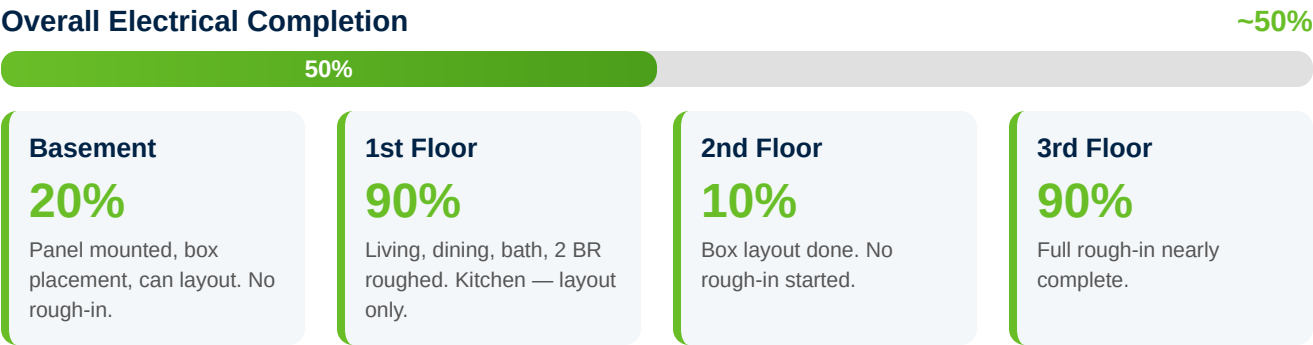

 Electrical Scope of Work — Full Estimate

DESCRIPTION	QTY / UNIT	MATERIALS	LABOR	LINE TOTAL
SERVICE ENTRANCE & PANEL DISTRIBUTION				
200A main service entrance & meter base	1 ea	\$2,800	\$1,500	\$4,300
200A main breaker panel (basement)	1 ea	\$850	\$750	\$1,600
100A sub-panel per floor (1st, 2nd, 3rd)	3 ea	\$1,800	\$2,250	\$4,050
Panel feeders — copper SER cable per floor	3 runs	\$1,200	\$900	\$2,100
Service & Panels Subtotal				\$12,050
BASEMENT — ELECTRICAL				
Recessed can lights (4" LED)	6 ea	\$240	\$360	\$600
Duplex receptacles (20A circuits)	8 ea	\$120	\$480	\$600
GFCI receptacles (laundry / utility)	3 ea	\$90	\$180	\$270

DESCRIPTION	QTY / UNIT	MATERIALS	LABOR	LINE TOTAL
Wall switches (single pole)	4 ea	\$40	\$240	\$280
Dedicated circuits — washer, dryer, water heater, HVAC	4 ea	\$400	\$600	\$1,000
Smoke/CO detectors (hardwired)	2 ea	\$80	\$120	\$200
EMT conduit runs (Chicago code)	150 ft	\$375	\$750	\$1,125
Basement Subtotal				\$4,075
PER FLOOR UNIT — 1ST, 2ND, 3RD FLOOR (×3 FLOORS)				
Recessed can lights (4" LED) — living, dining, kitchen, bath, bedrooms	14 ea × 3	\$1,680	\$2,520	\$4,200
Duplex receptacles — all rooms	20 ea × 3	\$900	\$3,600	\$4,500
GFCI receptacles — kitchen (2), bathroom (1), exterior (1)	4 ea × 3	\$360	\$720	\$1,080
Wall switches — single pole + 3-way	12 ea × 3	\$432	\$2,160	\$2,592
Kitchen dedicated circuits — range, dishwasher, disposal, fridge, microwave	5 ea × 3	\$1,125	\$2,250	\$3,375
Bathroom exhaust fan/light combo	1 ea × 3	\$270	\$450	\$720
Smoke/CO detectors (hardwired) — bedrooms, hallway, kitchen	5 ea × 3	\$600	\$900	\$1,500
HVAC disconnect/circuit per unit	1 ea × 3	\$300	\$450	\$750
EMT conduit runs per floor (Chicago code)	200 ft × 3	\$1,500	\$4,500	\$6,000
3 Floors Subtotal				\$24,717
COMMON AREAS & EXTERIOR				
Stairwell lighting (3 levels) — LED fixtures + 3-way switches	6 ea	\$360	\$540	\$900
Exterior lighting — front entry, rear porch (3 levels), security	6 ea	\$480	\$540	\$1,020
Doorbell / intercom rough-in (per unit)	3 ea	\$150	\$270	\$420
Exterior GFCI receptacles (front + rear)	4 ea	\$120	\$240	\$360
Common / Exterior Subtotal				\$2,700
PERMIT & INSPECTIONS				
City of Chicago electrical permit (residential rehab)	1	\$1,500	—	\$1,500

DESCRIPTION	QTY / UNIT	MATERIALS	LABOR	LINE TOTAL
Rough-in inspection coordination (per floor)	4 ea	—	\$400	\$400
Final inspection coordination	1	—	\$200	\$200
Permit & Inspection Subtotal				\$2,100
Subtotal (Materials + Labor)				\$45,642
Materials Markup (25%)				\$3,818
Contingency (10%)				\$4,564
GRAND TOTAL				\$54,024

 Labor Rates

Master Electrician	\$95/hr
Journeyman Electrician	\$75/hr
Apprentice	\$45/hr

Estimated total labor hours: ~380 hrs

 Payment Schedule

Milestone 1 — Contract signing (mobilization)	25%	\$13,506
Milestone 2 — Rough-in 50% complete (all floors started)	25%	\$13,506
Milestone 3 — Rough-in inspection passed	25%	\$13,506
Milestone 4 — Final inspection & project close	25%	\$13,506

 Terms & Conditions

- Estimate valid for 30 days from date of issue.
- All work performed per City of Chicago electrical code (EMT conduit required — no exposed Romex).
- Material prices subject to change based on supplier availability at time of purchase.
- Excludes: HVAC equipment, plumbing, drywall, painting, finish fixtures (unless specified).
- Change orders for additional scope billed at hourly rates listed above.
- Warranty: 1-year workmanship warranty on all electrical installations.
- Customer responsible for providing clear access to all work areas.

BLACKTECH SOLUTIONS CORP | 14076 Lincoln Ave, Dolton, IL | payroll@blacktechsolutionscorp.com | EIN: 82-3394717
Licensed Electrical Contractor — City of Chicago